



**CIVIL AVIATION DEPARTMENT**  
**Republic of Maldives**

---

# **MALDIVIAN CIVIL AVIATION REGULATIONS**

**MCAR - 4**  
**Aeronautical Charts**

**I. LIST OF AMENDMENTS**

Initial Issue	All	01-10-10	01-10-10	CAD		

**11.LIST OF EFFECTIVE PAGES**

<b>Section</b>	<b>Page</b>	<b>Amendment No.</b>	<b>Date</b>
<b>List of Amendments</b>	LOA-1	Initial Issue	01.10.2010
<b>List of Effective Pages</b>	LEP -1 LEP -2 LEP -3	Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010
<b>Table of Contents</b>	TOC -1 TOC -2 TOC -3 TOC -4 TOC -5 TOC -6	Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Effectivity</b>	<b>1-1</b>	Initial Issue	01.10.2010
<b>Chapter 1</b>	<b>1-1</b> <b>1-2</b>	Initial Issue Initial Issue	01.10.2010 01.10.2010
<b>Chapter 2</b>	<b>2-1</b> <b>2-2</b> <b>2-3</b> <b>2-4</b> <b>2-5</b> <b>2-6</b> <b>2-7</b>	Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Chapter 3</b>	<b>3-1</b> <b>3-2</b> <b>3-3</b> <b>3-4</b> <b>3-5</b>	Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Chapter 4</b>	<b>4-1</b> <b>4-2</b> <b>4-3</b> <b>4-4</b>	Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Chapter 5</b>	<b>5-1</b> <b>5-2</b> <b>5-3</b> <b>5-4</b> <b>5-5</b> <b>5-6</b>	Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 Initial Issue

<b>Chapter 6</b>	<b>6-1</b>	Initial Issue	01.10.2010
	<b>6-2</b>	Initial Issue	01.10.2010
<b>Chapter 7</b>	<b>7-1</b>	Initial Issue	01.10.2010
	<b>7-2</b>	Initial Issue	01.10.2010
	<b>7-3</b>	Initial Issue	01.10.2010
	<b>7-4</b>	Initial Issue	01.10.2010
<b>Chapter 8</b>	<b>8-1</b>	Initial Issue	01.10.2010
	<b>8-2</b>	Initial Issue	01.10.2010
	<b>8-3</b>	Initial Issue	01.10.2010
	<b>8-4</b>	Initial Issue	01.10.2010
<b>Chapter 9</b>	<b>9-1</b>	Initial Issue	01.10.2010
	<b>9-2</b>	Initial Issue	01.10.2010
	<b>9-3</b>	Initial Issue	01.10.2010
	<b>9-4</b>	Initial Issue	01.10.2010
	<b>9-5</b>	Initial Issue	01.10.2010
<b>Chapter 10</b>	<b>10-1</b>	Initial Issue	01.10.2010
	<b>10-2</b>	Initial Issue	01.10.2010
	<b>10-3</b>	Initial Issue	01.10.2010
	<b>10-4</b>	Initial Issue	01.10.2010
<b>Chapter 11</b>	<b>11-1</b>	Initial Issue	01.10.2010
	<b>11-2</b>	Initial Issue	01.10.2010
	<b>11-3</b>	Initial Issue	01.10.2010
	<b>11-4</b>	Initial Issue	01.10.2010
	<b>11-5</b>	Initial Issue	01.10.2010
	<b>11-6</b>	Initial Issue	01.10.2010
	<b>11-7</b>	Initial Issue	01.10.2010
	<b>11-8</b>	Initial Issue	01.10.2010
<b>Chapter 12</b>	<b>12-1</b>	Initial Issue	01.10.2010
	<b>12-2</b>	Initial Issue	01.10.2010
	<b>12-3</b>	Initial Issue	01.10.2010
<b>Chapter 13</b>	<b>13-1</b>	Initial Issue	01.10.2010
	<b>13-2</b>	Initial Issue	01.10.2010
	<b>13-3</b>	Initial Issue	01.10.2010
	<b>13-4</b>	Initial Issue	01.10.2010
<b>Chapter 14</b>	<b>14-1</b>	Initial Issue	01.10.2010
	<b>14-2</b>	Initial Issue	01.10.2010
<b>Chapter 15</b>	<b>15-1</b>	Initial Issue	01.10.2010
	<b>15-2</b>	Initial Issue	01.10.2010
<b>Chapter 16</b>	<b>16-1</b>	Initial Issue	01.10.2010
	<b>16-2</b>	Initial Issue	01.10.2010
	<b>16-3</b>	Initial Issue	01.10.2010
	<b>16-4</b>	Initial Issue	01.10.2010

	<b>16-5</b> <b>16-6</b> <b>16-7</b> <b>16-8</b>	Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Chapter 17</b>	<b>17-1</b> <b>17-2</b> <b>17-3</b> <b>17-4</b> <b>17-5</b> <b>17-6</b> <b>17-7</b>	Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Chapter 18</b>	<b>18-1</b> <b>18-2</b> <b>18-3</b> <b>18-4</b> <b>18-5</b>	Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Chapter 19</b>	<b>19-1</b> <b>19-2</b> <b>19-3</b>	Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010
<b>Chapter 20</b>	<b>20-1</b> <b>20-2</b> <b>20-3</b>	Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010
<b>Chapter 21</b>	<b>21-1</b> <b>21-2</b> <b>21-3</b>	Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010
<b>Appendix 1</b>	<b>App 1-1</b>	Initial Issue	01.10.2010
<b>Appendix 2</b>	<b>App 2-1</b> <b>App 2-2</b> <b>App 2-3</b> <b>App 2-4</b> <b>App 2-5</b> <b>App 2-6</b> <b>App 2-7</b> <b>App 2-8</b> <b>App 2-9</b> <b>App 2-10</b> <b>App 2-11</b> <b>App 2-12</b>	Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010 01.10.2010
<b>Appendix 3</b>	<b>App 3-1</b> <b>App 3-2</b>	Initial Issue Initial Issue	01.10.2010 01.10.2010

<b>Appendix 4</b>	<b>App 4-1</b>	Initial Issue	01.10.2010
<b>Appendix 5</b>	<b>App 5-1</b>	Initial Issue	01.10.2010
<b>Appendix 6</b>	<b>App 6-1</b> <b>App 6-2</b> <b>App 6-3</b> <b>App 6-4</b>	Initial Issue Initial Issue Initial Issue Initial Issue	01.10.2010 01.10.2010 01.10.2010 01.10.2010

### **III TABLE OF CONTENTS**

#### **I. LIST OF AMENDMENTS**

#### **II. LIST OF EFFECTIVE PAGES**

#### **III. TABLE OF CONTENTS**

### **CHAPTER 1 DEFINITIONS, APPLICABILITY AND AVAILABILITY**

- 1.1 Refer to MCAR-1
- 1.2 applicability
- 1.3 availability

### **CHAPTER 2 GENERAL SPECIFICATIONS**

- 2.1 operational requirements for chart
- 2.2 titles
- 2.3 miscellaneous information
- 2.4 symbols
- 2.5 units of measurements
- 2.6 scale and projection
- 2.7 date of validity of aeronautical information
- 2.8 spelling of geographical names
- 2.9 abbreviations
- 2.10 political boundaries
- 2.11 colours
- 2.12 relief
- 2.13 prohibited, restricted and danger areas
- 2.14 air traffic services airspaces
- 2.15 magnetic variation
- 2.16 typography
- 2.17 aeronautical data
- 2.18 common reference systems

### **CHAPTER 3 AERODROME OBSTACLE CHART — ICAO TYPE A (OPERATING LIMITATIONS)**

- 3.1 Function
- 3.2 Availability
- 3.3 Units of measurement
- 3.4 Coverage and scale
- 3.5 Format
- 3.6 Identification
- 3.7 Magnetic Variation
- 3.8 Aeronautical data
- 3.9 Accuracy

<b>CHAPTER 4</b>	<b>AERODROME OBSTACLE CHART — ICAO TYPE B</b>
	4.1 Function
	4.2 Availability
	4.3 Units of measurement
	4.4 Coverage and scale
	4.5 Format
	4.6 Identification
	4.7 Culture and topography
	4.8 Magnetic Variation
	4.9 Aeronautical Data
	4.10 Accuracy
<b>CHAPTER 5</b>	<b>AERODROME TERRAIN AND OBSTACLE CHART — ICAO (ELECTRONIC):</b>
	5.1 Function
	5.2 Availability
	5.3 Identification
	5.4 Chart Coverage
	5.5 Chart Content
	5.6 Accuracy and resolution
	5.7 Electronic Functionality
	5.8 Chart Data Product Specifications
<b>CHAPTER 6</b>	<b>PRECISION APPROACH TERRAIN CHART — ICAO</b>
	6.1 Function
	6.2 Availability
	6.3 Scale
	6.4 Identification
	6.5 Plan and Profile information
<b>CHAPTER 7</b>	<b>ENROUTE CHART — ICAO</b>
	7.1 Function
	7.2 Availability
	7.3 Coverage and scale
	7.4 Projection
	7.5 Identification
	7.6 Culture and topography
	7.7 Magnetic Variation
	7.8 Bearings, tracks and radials
	7.9 Aeronautical data
<b>CHAPTER 8</b>	<b>AREA CHART — ICAO</b>
	8.1 Function



- 
- 8.2 Availability
  - 8.3 Coverage and scale
  - 8.4 Projection
  - 8.5 Identification
  - 8.6 Culture and topography
  - 8.7 Magnetic Variation
  - 8.8 Bearings, tracks and radials
  - 8.9 Aeronautical data

**CHAPTER 9                    STANDARD DEPARTURE CHART — INSTRUMENT (SID) — ICAO**

- 9.1 Function
- 9.2 Availability
- 9.3 Coverage and scale
- 9.4 Projection
- 9.5 Identification
- 9.6 Culture and topography
- 9.7 Magnetic Variation
- 9.8 Bearings, tracks and radials
- 9.9 Aeronautical Data

**CHAPTER 10                STANDARD ARRIVAL CHART — INSTRUMENT (STAR) — ICAO**

- 10.1 Function
- 10.2 Availability
- 10.3 Coverage and scale
- 10.4 Projection
- 10.5 Identification
- 10.6 Culture and topography
- 10.7 Magnetic Variation
- 10.8 Bearings, tracks and radials
- 10.9 Aeronautical Data

**CHAPTER 11                INSTRUMENT APPROACH CHART — ICAO**

- 11.1 Function
- 11.2 Availability
- 11.3 Coverage and scale
- 11.4 Format
- 11.5 Projection
- 11.6 Identification
- 11.7 Culture and topography
- 11.8 Magnetic Variation
- 11.9 Bearings, tracks and radials
- 11.10 Aeronautical Data

**CHAPTER 12                VISUAL APPROACH CHART — ICAO**

- 12.1 Function
- 12.2 Availability

- 12.3 Scale
- 12.4 Format
- 12.5 Projection
- 12.6 Identification
- 12.7 Culture and topography
- 12.8 Magnetic Variation
- 12.9 Bearings, tracks and radials
- 12.10 Aeronautical Data

**CHAPTER 13 AERODROME/HELIPORT CHART — ICAO**

- 13.1 Function
- 13.2 Availability
- 13.3 Coverage and scale
- 13.4 Identification
- 13.5 Magnetic Variation
- 13.6 Aerodrome Heliport Data

**CHAPTER 14 AERODROME GROUND MOVEMENT CHART — ICAO**

- 14.1 Function
- 14.2 Availability
- 14.3 Coverage and scale
- 14.4 Identification
- 14.5 Magnetic Variation
- 14.6 Aerodrome Data

**CHAPTER 15 AIRCRAFT PARKING/DOCKING CHART — ICAO**

- 15.1 Function
- 15.2 Availability
- 15.3 Coverage and scale
- 15.4 Identification
- 15.5 Magnetic Variation
- 15.6 Aerodrome Data

**CHAPTER 16 WORLD AERONAUTICAL CHART — ICAO 1:1 000 000**

- 16.1 Function
- 16.2 Availability
- 16.3 Scales
- 16.4 Format
- 16.5 Projection
- 16.6 Identification
- 16.7 Culture and topography
- 16.8 Magnetic Variation
- 16.9 Aeronautical Data

**CHAPTER 17            AERONAUTICAL CHART — ICAO 1:500 000**

- 17.1    Function
- 17.2    Availability
- 17.3    Scales
- 17.4    Format
- 17.5    Projection
- 17.6    Identification
- 17.7    Culture and topography
- 17.8    Magnetic Variation
- 17.9    Aeronautical Data

**CHAPTER 18            AERONAUTICAL NAVIGATION CHART — ICAO SMALL SCALE**

- 18.1    Function
- 18.2    Availability
- 18.3    Coverage and Scale
- 18.4    Format
- 18.5    Projection
- 18.6    Culture and topography
- 18.7    Magnetic Variation
- 18.8    Aeronautical Data

**CHAPTER 19            PLOTTING CHART — ICAO**

- 19.1    Function
- 19.2    Availability
- 19.3    Coverage and Scale
- 19.4    Format
- 19.5    Projection
- 19.6    Identification
- 19.7    Culture and topography
- 19.8    Magnetic Variation
- 19.9    Aeronautical Data

**CHAPTER 20            ELECTRONIC AERONAUTICAL CHART DISPLAY — ICAO**

- 20.1    Function
- 20.2    Information available for display
- 20.3    Display requirements
- 20.4    Provision and updating of data
- 20.5    Performance tests, malfunction alarms and indications
- 20.6    Backup arrangements

**CHAPTER 21            ATC SURVEILLANCE MINIMUM ALTITUDE CHART — ICAO**

- 21.1    Function
- 21.2    Availability
- 21.3    Coverage and Scale
- 21.4    Identification

- 21.5 Culture and topography
- 21.6 Magnetic Variation
- 21.7 Bearings, Tracks and Radials
- 21.8 Aeronautical Data
- 21.9

- APPENDIX 1 MARGINAL NOTE LAYOUT**
- APPENDIX 2. ICAO CHART SYMBOLS**
- APPENDIX 3 COLOUR GUIDE**
- APPENDIX 4 HYPSONOMETRIC TINT GUIDE**
- APPENDIX 5 SHEET LAYOUT INDEX FOR THE WORLD**

## **EFFECTIVITY**

The MCAR-4 becomes effective on 01 October 2010.

## **CHAPTER 1. DEFINITIONS, APPLICABILITY AND AVAILABILITY**

### **1.1 Definitions**

*Refer to MCAR-1*

### **1.2 Applicability**

The specifications of this MCAR shall be applicable to all aeronautical charts with effect from 01<sup>st</sup> October 2010.

AIS providers shall ensure that aeronautical charts conform to the prescribed (specifications) as far as practicable.

All charts should in addition conform to the recommended practices relevant to the particular chart.

### **1.3 Availability**

1.3.1 *Information.* The Authority (AIS Provider) shall on request by another Contracting State provide all information relating to the territory of Maldives that is necessary to enable the Standards of this regulation to be met.

1.3.2 *Charts.* The Authority (AIS Provider) shall, when so specified, ensure the availability of charts in whichever of the following ways is appropriate for a particular chart or single sheet of a chart series.

1.3.2.1 For any chart or single sheet of a chart series entirely contained within the territory of Maldives, having the jurisdiction over the territory shall either:

- a) produce the chart or sheet itself; or
- b) arrange for its production by another Contracting State or by an agency; or
- c) provide another Contracting State prepared to accept an obligation to produce the chart or sheet with the data necessary for its production.

1.3.2.2. For any chart or single sheet of a chart series which includes the territory of two or more Contracting States, the States having jurisdiction over the territory so included shall determine the manner in which the chart or sheet will be made available. This determination shall be made with due regard being given to regional air navigation agreements and to any programme of allocation established by the Council of ICAO

*Note.— The phrase “regional air navigation agreements” refers to the agreements approved by the Council of ICAO normally on the advice of regional air navigation meetings.*

---

1.3.3 . The Authority (AIS Provider) shall take all reasonable measures to ensure that the information it provides and the aeronautical charts made available are adequate and accurate and that they are maintained up to date by an adequate revision service.

1.3.4 *To improve worldwide dissemination of information on new charting techniques and production methods, it is recommended that appropriate charts produced by Contracting States*

*should be made available without charge to other Contracting States on request on a reciprocal basis.*

*Note.— Guidance material on the preparation of aeronautical charts, including sample formats, is contained in the Aeronautical Chart Manual (Doc 8697).*

\* ISO Standard

19101, *Geographic information — Reference model*  
19104, *Geographic information — Terminology*  
19108, *Geographic information — Temporal schema*  
19115, *Geographic information — Metadata*

## **CHAPTER 2 . GENERAL SPECIFICATIONS**

*Note.— The requirements given in this document are applicable to all ICAO aeronautical charts unless otherwise stated in the specifications of the chart concerned.*

### **2.1 Operational requirements for charts**

*Note.— For the purposes of this MCAR, the total flight is divided into the following phases:*

- Phase 1 — Taxi from aircraft stand to take-off point*
- Phase 2 — Take-off and climb to en-route ATS route structure*
- Phase 3 — En-route ATS route structure*
- Phase 4 — Descent to approach*
- Phase 5 — Approach to land and missed approach*
- Phase 6 — Landing and taxi to aircraft stand.*

2.1.1 Each type of chart shall provide information relevant to the function of the chart and its design shall observe Human Factors principles which facilitate its optimum use.

*Note.— Guidance material on the application of Human Factors principles can be found in the Human Factors Training Manual (ICAO Doc 9683).*

2.1.2 Each type of chart shall provide information appropriate to the phase of flight, to ensure the safe and expeditious operation of the aircraft.

2.1.3 The presentation of information shall be accurate, free from distortion and clutter, unambiguous, and be readable under all normal operating conditions.

2.1.4 Colours or tints and type size used shall be such that the chart can be easily read and interpreted by the pilot in varying conditions of natural and artificial light.

2.1.5 The information shall be in a form which enables the pilot to acquire it in a reasonable time consistent with workload and operating conditions.

2.1.6 The presentation of information provided on each type of chart shall permit smooth transition from chart to chart as appropriate to the phase of flight.

2.1.7 The charts shall be True North orientated.

2.1.8 It is recommended that the basic sheet size of the charts should be 210 x 148 mm (8.27 x 5.82 in) (A5).

### **2.2 Titles**

The title of a chart or chart series prepared in accordance with the specifications contained in this MCAR and intended to satisfy the function of the chart, shall be that of the relevant chapter heading as modified by application of any Standard contained therein, except that such title shall not include "ICAO" unless the chart conforms with all Standards specified in this Chapter 2 and any specified for the particular chart.

### **2.3 Miscellaneous information**

2.3.1 The marginal note layout shall be as given in Appendix 1, except as otherwise specified for a particular chart.

2.3.2 The following information shall be shown on the face of each chart unless otherwise stated in the specification of the chart concerned:

1) designation or title of the chart series:

*Note.— The title may be abbreviated.*

2) name and reference of the sheet:

3) on each margin an indication of the adjoining sheet (when applicable).

2.3.3 A legend to the symbols and abbreviations used shall be provided. The legend shall be on the face or reverse of each chart except that, where it is impracticable for reasons of space, a legend may be published separately.

2.3.4 The name and adequate address of the producing agency shall be shown in the margin of the chart except that, where the chart is published as part of an aeronautical document, this information may be placed in the front of that document.

### **2.4 Symbols**

2.4.1 Symbols used shall conform to those shown in Appendix 2 – ICAO Chart, except that where it is desired to show on an aeronautical chart special features or items of importance to civil aviation for which no ICAO symbol is at present provided, any appropriate symbol may be chosen for this purpose, provided that it does not cause confusion with any existing ICAO chart symbol or impair the legibility of the chart.

*Note:-* The size and prominence of symbols and the thickness and spacing of lines may be varied according to the scale and functions of the chart, with due regard to the importance of the information they convey.

2.4.2 To represent ground-based navigation aids, intersections and waypoints, the same basic symbol shall be used on all charts on which they appear, regardless of chart purpose.

2.4.3 The symbol used for significant points shall be based on a hierarchy of symbols and selected in the following order: ground-based navigation aid, intersection, waypoint symbol. A waypoint symbol shall be used only when a particular significant point does not already exist as either a ground-based navigation aid or intersection.

2.4.4 The Authority/AIS provider shall ensure that as of 18 November 2010, symbols are shown in the manner specified in D2.4.2, D2.4.3 and Appendix 2 – ICAO Chart Symbols, symbol number 121.

2.4.5 The Authority/AIS provider should ensure that symbols are shown in the manner specified in D2.4.2, D2.4.3 and Appendix 2 – ICAO Chart Symbols, symbol number 121

### **2.5 Units of measurement**

2.5.1 Distances shall be derived as geodesic distances.

2.5.2 Distances shall be expressed in either kilometres or nautical miles or both, provided the units are clearly differentiated.



2.5.3 Altitudes, elevations and heights shall be expressed in either metres or feet or both, provided the units are clearly differentiated.

2.5.4 Linear dimensions on aerodromes and short distances shall be expressed in metres.

2.5.5 The order of resolution of distances, dimensions, elevations and heights shall be that as specified for a particular chart.

2.5.6 The units of measurement used to express distances, altitudes, elevations and heights shall be conspicuously stated on the face of each chart.

2.5.7 Conversion scales (kilometres/nautical miles, metres/feet) shall be provided on each chart on which distances, elevations or altitudes are shown. The conversion scales shall be placed on the face of each chart.

## **2.6 Scale and projection**

2.6.1 For charts of large areas, the name and basic parameters and scale of the projection shall be indicated.

2.6.2 For charts of small areas, a linear scale only shall be indicated

## **2.7 Date of validity of aeronautical information**

The date of validity of aeronautical information shall be clearly indicated on the face of each chart.

## **2.8 Spelling of geographical names**

2.8.1 The symbols of the Roman alphabet shall be used for all writing.

2.8.2 The names of places and of geographical features in countries which officially use varieties of the Roman alphabet shall be accepted in their official spelling, including the accents and diacritical marks used in the respective alphabets.

2.8.3 Where a geographical term such as "cape", "point", "gulf", "river", is abbreviated on any particular chart, that word shall be spelt out in full in the language used by the publishing agency, in respect of the most important example of each type. Punctuation marks shall not be used in abbreviations within the body of a chart.

2.8.4 It is recommended that in areas where Romanized names have not been officially produced or adopted, and outside the territory of Contracting States, names should be transliterated from the non-Roman alphabet form by the system generally used by the producing agency.

## **2.9 Abbreviations**

2.9.1 Abbreviations shall be used on aeronautical charts whenever they are appropriate.

2.9.2 It is recommended that where applicable, abbreviations should be selected from the Procedures for

---

Air Navigation Services - ICAO Abbreviations and Codes (*ICAO Doc 8400*).

## **2.10 Political boundaries**

2.10.1 International boundaries shall be shown, but may be interrupted if data more important to the use of the chart would be obscured.

2.10.2 Where the territory of more than one State appears on a chart, the names identifying the countries shall be indicated..

## **2.11 Colours**

It is recommended that colours used on charts should conform to Appendix 3 — Colour Guide.

## **2.12 Relief**

2.12.1 Relief, where shown, shall be portrayed in a manner that will satisfy the chart users' need for:

- a) orientation and identification:
- b) safe terrain clearance:
- c) clarity of aeronautical information when shown:
- d) planning.

*Note.— Relief is usually portrayed by combinations of contours, hypsometric tints, spot elevations and hill shading, the choice of method being affected by the nature and scale of the chart and its intended use.*

2.12.2 It is recommended that where relief is shown by hypsometric tints, the tints used should be based on those shown in the Hypsometric Tint Guide in Appendix 4.

2.12.3 Where spot elevations are used they shall be shown for selected critical points.

2.12.3.1 The value of spot elevations of doubtful accuracy shall be followed by the sign +.

## **2.13 Prohibited, restricted and danger areas**

When prohibited, restricted or danger areas are shown, the reference or other identification shall be included, except that the nationality letters may be omitted.

## **2.14 Air traffic services airspaces**

2.14.1 When ATS airspace is shown on a chart, the class of airspace, the type, name or call

sign, the vertical limits and the radio frequency(ies) to be used shall be indicated and the horizontal limits depicted in accordance with Appendix 2 - ICAO Chart Symbols.

---

2.14.2 It is recommended that on charts used for visual flight, those parts of the ATS Airspace Classifications table in MCAR 11, applicable to the airspace depicted on the chart should be on the face or reverse of each chart.

## **2.15 Magnetic variation**

2.15.1 True North and magnetic variation shall be indicated. The order of resolution of magnetic variation shall be that as specified for a particular chart.

2.15.2 It is recommended that when magnetic variation is shown on a chart, the values shown should be those for the year nearest to the date of publication that is divisible by 5, i.e. 1980, 1985, etc. In exceptional cases where the current value would be more than one degree different, after applying the calculation for annual change, an interim date and value should be quoted.

*Note. - The date and the annual change may be shown.*

2.15.3 For instrument procedure charts, the publication of a magnetic variation change should be completed within a maximum of six AIRAC cycles.

2.15.4 In large terminal areas with multiple aerodromes, a single rounded value of magnetic variation should be applied so that the procedures that service multiple aerodromes use a single, common variation value.

## **2.16 Typography**

*Note. - Samples of type suitable for use on aeronautical charts are included in the Aeronautical Chart Manual (ICAO Doc 8697).*

## **2.17 Aeronautical data**

2.17.1 The Authority/AIS Provider shall take all necessary measures to introduce a properly organized quality system containing procedures, processes and resources necessary to implement quality management at each function stage as outlined in MCAR.15, 3.2. The execution of such quality management shall be made demonstrable for each function stage, when required. In addition, States shall ensure that established procedures exist in order that aeronautical data at any moment is traceable to its origin so to allow any data anomalies or errors, detected during the production/maintenance phases or in the operational use, to be corrected.

*Note.— Specifications governing the quality system are given in MCAR15 .*

2.17.2 Authority/AIS Provider Ltd shall ensure that the order of chart resolution of aeronautical data shall be that as specified for a particular chart and as presented in a tabular form in Appendix 6.

2.17.3 Authority/AIS Provider shall ensure that integrity of aeronautical data is maintained

throughout the data process from survey/origin to the next intended user. Aeronautical data integrity requirements shall be based upon the potential risk resulting from the corruption of data and upon the use to which the data item is put. Consequently, the following classification and data integrity level shall apply:

- 
- a) critical data, integrity level  $1 \times 10^{-8}$  there is a high probability when using corrupted critical data that the continued safe flight and landing of an aircraft would be severely at risk with the potential for catastrophe;
  - b) essential data, integrity level  $1 \times 10^{-5}$  there is a low probability when using corrupted essential data that the continued safe flight and landing of an aircraft would be severely at risk with the potential for catastrophe; and
  - c) routine data, integrity level  $1 \times 10^{-3}$  there is a very low probability when using corrupted routine data that the continued safe flight and landing of an aircraft would be severely at risk with the potential for catastrophe.

2.17.4 Aeronautical data quality requirements related to the integrity and data classification shall be as provided in Tables 1 to 5 in Appendix 6.

2.17.5 Protection of electronic aeronautical data while stored or in transit shall be totally monitored by the Cyclic Redundancy Check (CRC). To achieve protection of the integrity level of critical and essential aeronautical data as classified in 2.17.3, A 32- OR 24-BIT CRC ALGORITHM SHALL APPLY RESPECTIVELY.

2.17.6 It is recommended that to achieve protection of the integrity level of routine aeronautical data as classified in 2.17.3, a 16-bit CRC algorithm should apply.

*Note. - Guidance material on the aeronautical data quality requirements (accuracy, resolution, integrity, protection and traceability) is contained in the World Geodetic System — 1984 (WGS-84) Manual (ICAO Doc 9674). Supporting material in respect of the provisions of Appendix 6 related to chart resolution and integrity of aeronautical data is contained in RTCA Document DO-201A and European Organization for Civil Aviation Equipment (EUROCAE) Document ED-77 — Industry Requirements for Aeronautical Information*

## **2.18 Common reference systems**

### 2.18.1 Horizontal reference system

2.18.1.1 World Geodetic System - 1984 (WGS-84) shall be used as the horizontal (geodetic) reference system. Published aeronautical geographical coordinates (indicating latitude and longitude) shall be expressed in terms of the WGS-84 geodetic reference datum.

*Note.— Comprehensive guidance material concerning WGS-84 is contained in the World Geodetic System — 1984 (WGS-84) Manual (ICAO Doc 9674).*

2.18.1.2 Geographical coordinates which have been transformed into WGS-84 coordinates but whose accuracy of original field work does not meet the requirements in MCAR15, and MCAR 14, Chapter 2, shall be identified by an asterisk.

---

2.18.1.3 The order of chart resolution of geographical coordinates shall be that specified for a particular chart series and in accordance with Appendix 6, Table 1.

*Note.— Specifications governing the determination and reporting (accuracy of field work and data integrity) of WGS-84-related aeronautical coordinates for geographical positions established by air traffic services are given in MCAR11, Appendix 5, Table 1; and for aerodrome/heliport-related positions, in MCAR 14 and Annex 14 Volume II, Chapter 2, and in Table 1 of Appendices 5 and 1, respectively.*

## 2.18.2 Vertical reference system

2.18.2.1 Mean sea level (MSL) datum, which gives the relationship of gravity-related height (elevation) to a surface known as the geoid, shall be used as the vertical reference system.

*Note L— The geoid globally most closely approximates MSL. It is defined as the equipotential surface in the gravity field of the Earth that coincides with the undisturbed MSL extended continuously through the continents.*

*Note 2 — Gravity-related heights (elevations) are also referred to as orthometric heights while distances of points above the ellipsoid are referred to as ellipsoidal heights.*

2.18.2.2 In addition to the elevations referenced to MSL, for the specific surveyed ground positions, geoid undulation (referenced to the WGS-84 ellipsoid) for those positions shall also be published as specified for a particular chart.

*Note. — Specifications governing the determination and reporting (accuracy of field work and data integrity) of elevation and geoid undulation at specific positions at aerodromes are given in MCAR 14, and in Table 2 of Appendices 5 and 1, respectively*

2.18.2.3 The order of chart resolution of elevation and geoid undulation shall be that specified for a particular chart series and in accordance with Appendix 6, Table 2.

## 2.18.3 Temporal reference system

2.18.3.1 The Gregorian calendar and Coordinated Universal Time (UTC) shall be used as the temporal reference system.

2.18.3.2 When a different temporal reference system is used for charting, this shall be indicated in GEN 2.1.2 of the Aeronautical Information Publication (AIP).

## **CHAPTER 3. AERODROME OBSTACLE CHART - ICAO TYPE A (OPERATING LIMITATIONS)**

### **3.1 Function**

This chart, in combination with the Aerodrome Obstacle Chart - ICAO Type C or with the relevant information published in the AIP, shall provide the data necessary to enable an operator to comply with the operating limitations of MCAR OPS 1, Chapter 5, and Part III, Section 2, Chapter 3.

### **3.2 Availability**

3.2.1 Aerodrome Obstacle Charts - ICAO Type A (Operating Limitations) shall be made available in the manner prescribed in 1.3.2 for all aerodromes regularly used by international civil aviation, except for those aerodromes where there are no obstacles in the take-off flight path areas.

3.2.2 Where a chart is not required because no obstacles exist in the take-off flight path area, a notification to this effect shall be published.

### **3.3 Units of measurement**

3.3.1 Elevations shall be shown to the nearest half-metre or to the nearest foot.

3.3.2 Linear dimensions shall be shown to the nearest half-metre.

### **3.4 Coverage and scale**

3.4.1 The extent of each plan shall be sufficient to cover all obstacles.

*Note - Isolated distant obstacles that would unnecessarily increase the sheet size may be indicated by the appropriate symbol and an arrow, provided that the distance and bearing from the end of the runway farthest removed and the elevation are given.*

3.4.2 The horizontal scale shall be within the range of 1:10 000 to 1:15 000.

3.4.3 It is recommended that the horizontal scale should be 1:10 000.

*Note. — When the production of the charts would be expedited thereby, a scale of 1:20 000 may be used.*

3.4.4 The vertical scale shall be ten times the horizontal scale.

3.4.5 *Linear scales.* Horizontal and vertical linear scales showing both metres and feet shall be included in the charts.

### **3.5 Format**

3.5.1 The charts shall depict a plan and profile of each runway, any associated stopway or clearway, the take-off flight path area and obstacles.

3.5.2 The profile for each runway, stopway, clearway and the obstacles in the take-off flight path area shall be shown above its corresponding plan. The profile of an alternative take-off flight path area shall comprise a linear projection of the full take-off flight path and shall be disposed above its corresponding plan in the manner most suited to the ready interpretation of the information.

3.5.3 A profile grid shall be ruled over the entire profile area exclusive of the runway. The zero for vertical coordinates shall be mean sea level. The zero for horizontal coordinates shall be the end of the runway furthest from the take-off flight path area concerned. Graduation marks indicating the subdivisions of intervals shall be shown along the base of the grid and along the vertical margins.

3.5.3.1 It is recommended that the vertical grid should have intervals of 30 m (100 ft) and the horizontal grid should have intervals of 300 m (1 000 ft).

3.5.4 The chart shall include:

- a) a box for recording the operational data specified in 3.8.3;
- b) a box for recording amendments and dates thereof.

### **3.6 Identification**

The chart shall be identified by the name of the country in which the aerodrome is located, the name of the city or town, or area, which the aerodrome serves, the name of the aerodrome and the designator(s) of the runway(s).

### **3.7 Magnetic variation**

The magnetic variation to the nearest degree and date of information shall be indicated.

### **3.8 Aeronautical data**

#### **3.8.1 Obstacles**

3.8.1.1 Objects in the take-off flight path area which project above a plane surface having a 1.2 per cent slope and having a common origin with the take-off flight path area, shall be regarded as obstacles, except that obstacles lying wholly below the shadow of other obstacles as defined in 3.8.1.2 need not be shown. Mobile objects such as boats, trains and trucks, which may project above the 1.2 per cent plane, shall be considered obstacles but shall not be considered as being capable of creating a shadow.

3.8.1.2 The shadow of an obstacle is considered to be a plane surface originating at a horizontal line passing through the top of the obstacle at right angles to the centre line of the take-off flight path area. The plane covers the complete width of the take-off flight path area and extends to the plane defined in 3.8.1.1 or to the next higher obstacle if it occurs first. For the first 300 m (1 000 ft) of the take-off flight path area, the shadow planes are horizontal and beyond this point such planes have an upward slope of 1.2 per cent.

3.8.1.3 If the obstacle creating a shadow is likely to be removed, objects that would become obstacles by its removal shall be shown.

### 3.8.2 Take-off flight path area

3.8.2.1 The take-off flight path area consists of a quadrilateral area on the surface of the earth lying directly below, and symmetrically disposed about, the take-off flight path. This area has the following characteristics:

- a) it commences at the end of the area declared suitable for take-off (i.e. at the end of the runway or clearway as appropriate);
- b) its width at the point of origin is 180 m (600 ft) and this width increases at the rate of 0.25D to a maximum of 1 800 m (6 000 ft), where D is the distance from the point of origin;
- d) it extends to the point beyond which no obstacles exist or to a distance of 10.0 km (5.4 NM), whichever is the lesser.

3.8.2.2 For runways serving aircraft having operating limitations which do not preclude the use of a take-off flight path gradient of less than 1.2 per cent, the extent of the takeoff flight path area specified in 3.8.2.1 c) shall be increased to not less than 12.0 km (6.5 NM) and the slope of the plane surface specified in 3.8.1.1 and 3.8.1.2 shall be reduced to 1.0 per cent or less.

*Note.— When a 1.0 per cent survey plane touches no obstacles, this plane may be lowered until it touches the first obstacle.*

### 3.8.3 Declared distances

3.8.3.1 The following information for each direction of each runway shall be entered in the space provided:

- a) take-off run available;
- b) accelerate-stop distance available;
- c) take-off distance available;
- d) landing distance available.

*Note.— In MCAR 14., Attachment A, Section 3, guidance is given on declared distances.*

3.8.3.2 It is recommended that where a declared distance is not provided because a runway is usable in one direction only, that runway should be identified as “not usable for takeoff, landing or both”.

### 3.8.4 Plan and profile views

3.8.4.1 The plan view shall show:

- a) the outline of the runways by a solid line, including the length and width, the magnetic bearing to the nearest degree, and the runway number;
- b) the outline of the clearways by a broken line, including the length and identification as such;



- 
- c) take-off flight path areas by a dashed line and the centre line by a fine line consisting of short and long dashes;
  - d) alternative take-off flight path areas. When alternative take-off flight path areas not centred on the extension of the runway centre line are shown, notes shall be provided explaining the significance of such areas;
  - e) obstacles, including:
    - 1) the exact location of each obstacle together with a symbol indicative of its type
    - 2) the elevation and identification of each obstacle;
    - 3) the limits of penetration of obstacles of large extent in a distinctive manner identified in the legend.

*Note.— This does not exclude the necessity for indicating critical spot elevations within the take-off flight path area.*

3.8.4.1.1 It is recommended that the nature of the runway and stopway surfaces should be indicated.

3.8.4.1.2 It is recommended that the stopways should be identified as such and should be shown by a broken line.

3.8.4.1.3 When stopways are shown, the length of each stopway shall be indicated.

3.8.4.2 The profile view shall show:

- a) the profile of the centre line of the runway by a solid line and the profile of the centre line of any associated stopways and clearways by a broken line;
- b) the elevation of the runway centre line at each end of the runway, at the stopway and at the origin of each takeoff flight path area, and at each significant change in slope of runway and stopway;
- c) obstacles, including:
  - 1) each obstacle by a solid vertical line extending from a convenient grid line over at least one other grid line to the elevation of the top of the obstacle;
  - 2) identification of each obstacle;
  - 3) the limits of penetration of obstacles of large extent in a distinctive manner identified in the legend.

*Note.— An obstacle profile consisting of a line joining the tops of each obstacle and representing the shadow created by successive obstacles may be shown.*

### **3.9 Accuracy**

3.9.1 The order of accuracy attained shall be shown on the chart.

3.9.2 It is recommended that the horizontal dimensions and the elevations of the runway, stopway and clearway to be printed on the chart should be determined to the nearest 0.5 m (1 ft).

3.9.3 It is recommended that the order of accuracy of the field work and the precision of chart production should be such that measurements in the take-off flight path areas can be taken from the chart within the following maximum deviations:

- 1) horizontal distances: 5 m (15 ft) at a point of origin increasing at a rate of 1 per 500;
- 2) vertical distances: 0.5 m (1.5 ft) in the first 300 m (1 000 ft) and increasing at a rate of 1 per 1 000.

3.9.4 *Datum*. Where no accurate datum for vertical reference is available, the elevation of the datum used shall be stated and shall be identified as assumed.

## **CHAPTER 4. AERODROME OBSTACLE CHART — ICAO TYPE B**

### **4.1 Function**

This chart shall provide information to satisfy the following functions:

- a) the determination of minimum safe altitudes/heights including those for circling procedures;
- b) the determination of procedures for use in the event of an emergency during take-off or landing;
- c) the application of obstacle clearing and marking criteria; and
- e) the provision of source material for aeronautical charts.

### **4.2 Availability**

4.2.1 It is recommended that aerodrome Obstacle Charts - ICAO Type B should be made available, in the manner prescribed in 1.3.2, for all aerodromes regularly used by international civil aviation.

4.2.2 When a chart combining the specifications of Chapters 3 and 4 is made available, it shall be called the Aerodrome Obstacle Chart - ICAO (Comprehensive).

### **4.3 Units of measurement**

4.3.1 Elevations shall be shown to the nearest half-metre or to the nearest foot.

4.3.2 Linear dimensions shall be shown to the nearest half-metre.

### **4.4 Coverage and scale**

4.4.1 The extent of each plan shall be sufficient to cover all obstacles.

*Note - Isolated distant obstacles that would unnecessarily increase the sheet size may be indicated by the appropriate symbol and an arrow, provided that the distance and bearing from the aerodrome reference point and elevation are given.*

4.4.2 The horizontal scale shall be within the range of 1:10 000 to 1:20 000.

4.4.3 A horizontal linear scale showing both metres and feet shall be included in the chart. When necessary, a linear scale for kilometres and a linear scale for nautical miles shall also be shown.

### **4.5 Format**

The charts shall include:

- a) any necessary explanation of the projection used;
- b) any necessary identification of the grid used;
- c) a notation indicating that obstacles are those which penetrate the surfaces specified in MCAR 14, Chapter 4;

- d) a box for recording amendments and dates thereof;
- e) outside the neat line, every minute of latitude and longitude marked in degrees and minutes.

*Note.— Lines of latitude and longitude may be shown across the face of the chart.*

#### **4.6 Identification**

The chart shall be identified by the name of the country in which the aerodrome is located, the name of the city or town, or area, which the aerodrome serves and the name of the aerodrome.

#### **4.7 Culture and topography**

4.7.1 Drainage and hydrographic details shall be kept to a minimum.

4.7.2 Buildings and other salient features associated with the aerodrome shall be shown. Wherever possible, they shall be shown to scale.

4.7.3 All objects, either cultural or natural, that project above the take-off and approach surfaces specified in 4.9 or the clearing and marking surfaces specified in MCAR 14, Chapter 4, shall be shown.

4.7.4 Roads and railroads within the take-off and approach area, and less than 600 m (2 000 ft) from the end of the runway or runway extensions, shall be shown.

*Note - Geographical names of features may be shown if of significance.*

#### **4.8 Magnetic variation**

The chart shall show a compass rose orientated to the True North, or a North point, showing the magnetic variation to the nearest degree with the date of magnetic information and annual change.

#### **4.9 Aeronautical data**

4.9.1 The charts shall show:

- a) the aerodrome reference point and its geographical coordinates in degrees, minutes and seconds;
- b) the outline of the runways by a solid line;
- c) the length and width of the runway;
- d) the magnetic bearing to the nearest degree of the runway and the runway number;
- f) the elevation of the runway centre line at each end of the runway, at the stopway, at the origin of each takeoff and approach area, and at each significant change of slope of runway and stopway;
- g) taxiways, aprons and parking areas identified as such, and the outlines by a solid line;

- g) stopways identified as such and depicted by a broken line;
- h) the length of each stopway;
- i) clearways identified as such and depicted by a broken line;
- j) the length of each clearway;
- k) take-off and approach surfaces identified as such and depicted by a broken line;
- l) take-off and approach areas;

*Note.— The take-off area is described in 3.8.2.1. The approach area consists of an area on the surface of the earth lying directly below the approach surface as specified in MCAR 14, Chapter 4.*

- m) obstacles at their exact location, including:
  - 1) a symbol indicative of their type;
  - 2) elevation;
  - 3) identification;
  - 4) limits of penetration of large extent in a distinctive manner identified in the legend;

*Note.— This does not exclude the necessity for indicating critical spot elevations within the take-off and approach areas.*

- n) any additional obstacles, as determined by 3.8.1.1 including the obstacles in the shadow of an obstacle, which would otherwise be exempted.

*Note.— The specifications in MCAR 14, Chapter 4, are minimum requirements. Where the competent authority has established lower surfaces, they may be used in the determination of obstacles.*

4.9.1.1 It is recommended that the nature of the runway and stopway surfaces should be given.

4.9.1.2 It is recommended that wherever practicable, the highest object or obstacle between adjacent approach areas within a radius of 5 000 m (15 000 ft) from the aerodrome reference point should be indicated in a prominent manner.

4.9.1.3 It is recommended that the extent of tree areas and relief features, part of which constitute obstacles, should be shown.

#### 4.10 Accuracy

4.10.1 The order of accuracy attained shall be shown on the chart.

4.10.2 It is recommended that the horizontal dimensions and the elevations of the movement area, stopways and clearways to be printed on the chart should be determined to the nearest 0.5 m (1 ft).

4.10.3 It is recommended that the order or accuracy of the field work and the precision of chart production should be such that the resulting data will be within the maximum deviations indicated herein:

a) Take-off and approach areas:

1) horizontal distances: 5 m (15 ft) at point of origin increasing at a rate of 1 per 500;

2) vertical distances: 0.5 m (1.5 ft) in the first 300 m (1 000 ft) and increasing at a rate of 1 per 1 000.

b) Other areas:

1) horizontal distances: 5 m (15 ft) within 5 000 m (15 000 ft) of the aerodrome reference point and 12 m (40 ft) beyond that area;

2) vertical distances: 1 m (3 ft) within 1 500 m (5 000 ft) of the aerodrome reference point increasing at a rate of 1 per 1 000.

4.10.4 *Datum*. Where no accurate datum for vertical reference is available, the elevation of the datum used shall be stated and identified as assumed.

## **CHAPTER 5 AERODROME TERRAIN AND OBSTACLE CHART — ICAO (ELECTRONIC)**

### **5.1 Function**

This electronic chart shall portray the terrain and obstacle data in combination with aeronautical data, as appropriate, necessary to:

- a) enable an operator to comply with the operating limitations of Operations Manual , Chapter 5, and Part III, Section II, Chapter 3 by developing contingency procedures for use in the event of an emergency during a missed approach or take-off, and by performing aircraft operating limitations analysis; and
- b) support the following air navigation applications:
  - 1) instrument procedure design (including circling procedure);
  - 2) aerodrome obstacle restriction and removal; and
  - 3) provision of source data for the production of other aeronautical charts.

### **5.2 Availability**

5.2.1 From 15 November 2010, Aerodrome Terrain and Obstacle Charts – ICAO (Electronic) shall be made available in the manner prescribed in 1.3.2 for all aerodromes regularly used by international civil aviation.

*Note 1 – Where the Aerodrome Terrain and Obstacle Chart – ICAO (Electronic) is made available, the Aerodrome Obstacle Chart – ICAO Type A (Operating Limitations) and the Aerodrome Obstacle Chart – ICAO Type B are not required (see 3.2.1 and 4.2.1).*

*Note 2 – The information required by the Precision Approach Terrain Chart – ICAO may be provided in the Aerodrome Terrain and Obstacle Chart — ICAO (Electronic). Where this occurs the Precision Approach Terrain Chart – ICAO is not required (see 6.2.1).*

5.2.2 It is recommended that Aerodrome Terrain and Obstacle Charts – ICAO (Electronic) should be made available in the manner prescribed in 1.3.2 for all aerodromes regularly used by international civil aviation.

5.2.3 The Aerodrome Terrain and Obstacle Chart – ICAO (Electronic) shall also be made available in hard copy format upon request.

*Note – For specifications regarding hard copy printed output see 5.7.7.*

5.2.4 The ISO 19100 series of standards for geographic information shall be used as a general data modeling framework.

*Note – The use of the ISO 19100 series of standards for geographic information supports the interchange and use of the Aerodrome Terrain and Obstacle Chart — ICAO (Electronic) among different users.*

### **5.3 Identification**

Electronic charts shall be identified by the name of the country in which the aerodrome is located, the name of the city or town which the aerodrome serves, and the name of the aerodrome.

### **5.4 Chart coverage**

The extent of each chart shall be sufficient to cover Area 2 as specified in MCAR 15, 10.2.

### **5.5 Chart content**

#### **5.5.1 General**

5.5.1.1 When developing computer graphic applications that are used to portray features on the chart, the relationships between features, feature attributes, and the underlying spatial geometry and associated topological relationships shall be specified by an application schema. Portrayed information shall be provided on the basis of portrayal specifications applied according to defined portrayal rules. Portrayal specifications and portrayal rules shall not be part of the data set. Portrayal rules shall be stored in a portrayal catalogue which shall make reference to separately-stored portrayal specifications.

*Note – ISO Standard 19117 contains a definition of the schema describing the portrayal mechanism of feature-based geographic information, while ISO Standard 19109 contains rules for application schema. Spatial geometry and associated topological relationships are defined in ISO Standard 19107.*

5.5.1.2 Symbols used to portray features shall be in accordance with 2.4 and Appendix 2 – ICAO Chart Symbols.

#### **5.5.2 Terrain feature**

5.5.2.1 The terrain feature, and associated attributes, to be portrayed and database linked to the chart shall be based on the electronic terrain data sets which satisfy the requirements of MCAR 15, Chapter 10 and Appendix 8.

5.5.2.2 The terrain feature shall be portrayed in a manner that provides an effective general impression of a terrain. This shall be a representation of terrain surface by continuous elevation values at all intersections of the defined grid, also known as the Digital Elevation Model (DEM).

*Note – In accordance with MCAR 15, Chapter 10 and Appendix 8, the DEM for Area 2 post spacing (grid) is specified at 1 arc second (approximately 30 m).*

5.5.2.3 It is recommended that representation of terrain surface should be provided as a selectable layer of contour lines in addition to the DEM.

5.5.2.4 It is recommended that an ortho-rectified image which matches the features on the DEM with features on the overlying image should be used to enhance the DEM. The image should be provided as a separate selectable layer.



~~5.5.2.5 The portrayed terrain feature shall be linked to the following associated attributes in the database(s):~~

- a) horizontal positions of grid points in geographic coordinates and elevations of the points;
- b) surface type;
- c) contour line values, if provided; and
- d) names of cities, towns and other prominent topographic features.

5.5.2.6 It is recommended that other terrain attributes specified in MCAR 15, Appendix 8, Table A8-3 and provided in the database(s) should be linked to the portrayed terrain feature.

#### 5.5.3 Obstacle features

5.5.3.1 Obstacle features, and associated attributes, portrayed or database-linked to the chart shall be based on electronic obstacle data sets which satisfy the requirements of MCAR 15,, Chapter 10 and Appendix 8.

5.5.3.2 Each obstacle shall be portrayed by an appropriate symbol and obstacle identifier.

5.5.3.3 The portrayed obstacle feature shall be linked to the following associated attributes in the database(s):

- a) horizontal position in geographic coordinates and associated elevation;
- b) obstacle type; and
- c) obstacle extent, if appropriate.

5.5.3.4 It is recommended that other obstacle attributes specified in MCAR 15,, Appendix 8, Table A8-4 and provided in the database(s) should be linked to the portrayed obstacle feature.

#### 5.5.4 Aerodrome features

5.5.4.1 Aerodrome features, and associated attributes, portrayed and database-linked to the chart shall be based on aerodrome data which satisfy the requirements of MCAR 14,, Appendix 5 and MCAR 15,, Appendix 7.

5.5.4.2 The following aerodrome features shall be portrayed by an appropriate symbol:

- a) aerodrome reference point;
- b) runway(s), with designation numbers, and if available, stopway(s) and clearway(s); and
- c) taxiways, aprons, large buildings and other prominent aerodrome features.

5.5.4.3 The portrayed aerodrome feature shall be linked to the following associated attributes in the database(s):

- a) geographical coordinates of the aerodrome reference point;
  
  
- b) aerodrome magnetic variation, year of information and annual change;

*Note – Magnetic variation may be database-linked to the aerodrome reference point.*

---

- c) length and width of runway(s), stopway(s) and clearway(s);
- d) type of surface of runway(s) and stopway(s);
- e) magnetic bearings of the runway(s) to the nearest degree;
- f) elevations at each end of runway(s), stopway(s) and clearway(s), and at each significant change in slope of runway(s) and stopway(s);
- g) declared distances for each runway direction, or the abbreviation “NU” where a runway direction cannot be used for take-off or landing or both.

*Note – MCAR 14,, Attachment A, provides guidance on declared distances.*

5.5.5 Radio navigation aid features Each radio navigation aid feature located within the chart coverage shall be portrayed by an appropriate symbol.

*Note – Navigation aid feature attributes may be linked to the portrayed navigation aid features in the database(s).*

## **5.6 Accuracy and resolution**

5.6.1 The order of accuracy of aeronautical data shall be as specified in MCAR11, Appendix 5 and MCAR 14,, Appendix 5 and Annex 14 Volume II, Appendix 1. The order of accuracy of terrain and obstacle data shall be as specified in MCAR 15,, Appendix 8.

5.6.2 The aeronautical data resolution shall be as specified in MCAR 15,, Appendix 7 while the resolution for terrain and obstacle data shall be as specified in MCAR 15,, Appendix 8.

## **5.7 Electronic functionality**

5.7.1 It shall be possible to vary the scale at which the chart is viewed. Symbols and text size shall vary with chart scale to enhance readability.

5.7.2 Information on the chart shall be geo-referenced, and it shall be possible to determine cursor position to at least the nearest second.

5.7.3 The chart shall be compatible with widely available desktop computer hardware, software and media.

5.7.4 It is recommended that the chart should include its own “reader” software.

5.7.5 It shall not be possible to remove information from the chart without an authorized update.

5.7.6 When, due to congestion of information, the details necessary to support the function of the chart cannot be shown with sufficient clarity on a single comprehensive chart view, selectable information layers shall be provided to allow for the customized combination of information.

*Note - An electronic chart format with user-selectable information layers is the preferred method of presentation for most aerodrome features.*

5.7.7 It shall be possible to print the chart in hard copy format according to the content specifications and scale determined by the user.

*Note 1 – Printed output may consist of “tiled” sheets or specific selected areas according to user requirements.*

*Note 2 – Feature attribute information available through database link may be supplied separately on appropriately referenced sheets.*

## **5.8 Chart data product specifications**

5.8.1 A comprehensive statement of the data sets comprising the chart shall be provided in the form of data product specifications on which basis air navigation users will be able to evaluate the chart data product and determine whether it fulfils the requirements for its intended use (application).

5.8.2 The chart data product specifications shall include an overview, a specification scope, a data product identification, data content information, the reference systems used, the data quality requirements, and information on data capture, data maintenance, data portrayal, data product delivery, as well as any additional information available, and metadata.

*Note – ISO Standard 19131 specifies the requirements and outline of data product specifications for geographic information.*

5.8.3 The overview of the chart data product specifications shall provide an informal description of the product and shall contain general information about the data product. The specification scope of the chart data product specifications shall contain the spatial (horizontal) extent of the chart coverage. The chart data product identification shall include the title of the product, a brief narrative summary of the content and purpose, and a description of the geographic area covered by the chart.

5.8.4 The data content of the chart data product specifications shall clearly identify the type of coverage and/or imagery and shall provide a narrative description of each.

*Note – ISO Standard 19123 contains schema for coverage geometry and functions.*

5.8.5 The chart data product specifications shall include information that defines the reference systems used. This shall include the spatial reference system (horizontal and vertical) and, if appropriate, temporal reference system. The chart data product specifications shall identify the data quality requirements. This shall include a statement on acceptable conformance quality levels and corresponding data quality measures. This statement shall cover all the data quality elements and data quality sub-elements, even if only to state that a specific data quality element or sub-element is not applicable.

*Note – ISO Standard 19113 contains quality principles for geographic information while ISO Standard 19114 covers quality evaluation procedures.*

5.8.6 The chart data product specifications shall include a data capture statement which shall be a general description of the sources and of processes applied for the capture of chart data. The principles and criteria applied in the maintenance of the chart shall also be provided in the chart data product specifications, including the frequency with which the chart product is updated. Of particular importance shall be the maintenance information of obstacle data sets included on the

5.8.7 The chart data product specifications shall contain information on how data are portrayed on the chart, as detailed in 5.5.1.1. The chart data product specifications shall also contain data product delivery information which shall include delivery formats and delivery medium information.

5.8.8 The core chart metadata elements shall be included in the chart data product specifications. Any additional metadata items required to be supplied shall be stated in the product specifications together with the format and encoding of the metadata.

*Note 1 – ISO Standard 19115 specifies requirements for geographic information metadata.*

*Note 2 – The chart data product specifications document the chart data product which is implemented as data set. Those data sets are described by metadata.*

## **CHAPTER 6 PRECISION APPROACH TERRAIN CHART - ICAO**

### **6.1 Function**

The chart shall provide detailed terrain profile information within a defined portion of the final approach so as to enable aircraft operating agencies to assess the effect of the terrain on decision height determination by the use of radio altimeters.

### **6.2 Availability**

6.2.1 The Precision Approach Terrain Chart - ICAO shall be made available for all precision approach runways Categories II and III at aerodromes used by international civil aviation.

6.2.2 The Precision Approach Terrain Chart - ICAO shall be revised whenever any significant change occurs.

### **6.3 Scale**

6.3.1 It is recommended that *the horizontal scale should be 1:2 500, and the vertical scale 1:500.*

6.3.2 It is recommended that *when the chart includes a profile of the terrain to a distance greater than 900 m (3 000 ft) from the runway threshold, the horizontal scale should be 1:5 000.*

### **6.4 Identification**

The chart shall be identified by the name of the country in which the aerodrome is located, the name of the city or town, or area, which the aerodrome serves, the name of the aerodrome and the designator of the runway.

### **6.5 Plan and profile information**

6.5.1 The chart shall include:

- 1) a plan showing contours at 1 m (3 ft) intervals in the area 60 m (200 ft) on either side of the extended centre line of the runway, to the same distance as the profile, the contours to be related to the runway threshold;
- 2) an indication where the terrain or any object thereon, within the plan defined in 1) above, differs by  $\pm 3$  m (10 ft) in height from the centre line profile and is likely to affect a radio altimeter;
- 3) a profile of the terrain to a distance of 900 m (3 000 ft) from the threshold along the extended centre line of the runway.

6.5.2 It is recommended that *where the terrain at a distance greater than 900 m (3 000 ft) from the runway threshold is mountainous or otherwise significant to users of the chart, the profile of the terrain should be shown to a distance not exceeding 2 000 m (6 500 ft) from the runway threshold.*

6.5.3 It is recommended that *the ILS reference datum height should be shown to the nearest half metre or foot.*

## **CHAPTER 7. ENROUTE CHART — ICAO**

### **7.1 Function**

This chart shall provide flight crews with information to facilitate navigation along ATS routes in compliance with air traffic services procedures.

*Note.— Simplified versions of these charts are appropriate for inclusion in Aeronautical Information Publications to complement the tabulation of radio communication and navigation facilities.*

### **7.2 Availability**

7.2.1 The Enroute Chart — ICAO shall be made available in the manner prescribed in 1.3.2 for all areas where flight information regions have been established.

*Note.— Under certain conditions, an Area Chart — ICAO may have to be provided. (See Chapter 8.)*

7.2.2 Where different air traffic services routes, position reporting requirements or lateral limits of flight information regions or control areas exist in different layers of airspace and cannot be shown with sufficient clarity on one chart, separate charts shall be provided.

### **7.3 Coverage and scale**

*Note 1.— A uniform scale for charts of this type cannot be specified due to the varying degree of congestion of information in certain areas.*

*Note 2.— A linear scale based on the mean scale of the chart may be shown.*

7.3.1 It is recommended that layout of sheet lines should be determined by the density and pattern of the ATS route structure.

7.3.2 Large variations of scale between adjacent charts showing a continuous route structure shall be avoided.

7.3.3 An adequate overlap of charts shall be provided to ensure continuity of navigation.

### **7.4 Projection**

7.4.1 It is recommended that a conformal projection on which a straight line approximates a great circle should be used.

7.4.2 Parallels and meridians shall be shown at suitable intervals.

7.4.3 Graduation marks shall be placed at consistent intervals along selected parallels and meridians.

### **7.5 Identification**

Each sheet shall be identified by chart series and number.

### **7.6 Culture and topography**

7.6.1 Generalized shore lines of all open water areas, large lakes and rivers shall be shown except where they conflict with data more applicable to the function of the chart.

7.6.2 Within each quadrilateral formed by the parallels and meridians the area minimum altitude shall be shown, except as provided for in 7.6.3.

7.6.3 It is recommended that in areas of high latitude where it is determined by the appropriate authority that True North orientation of the chart is impractical, the area minimum altitude should be shown within each quadrilateral formed by reference lines of the graticule (grid) used.

7.6.4 Where charts are not True North orientated, this fact and the selected orientation used shall be clearly indicated.

### **7.7 Magnetic variation**

It is recommended that isogonals should be indicated and the date of the isogonic information given.

### **7.8 Bearings, tracks and radials**

7.8.1 Bearings, tracks and radials shall be magnetic, except as provided for in 7.8.2.

7.8.2 It is recommended that in areas of high latitude where it is determined by the appropriate authority that reference to Magnetic North is impractical, another suitable reference, i.e. True North or Grid North, should be used.

7.8.3 Where bearings, tracks or radials are given with reference to True North or Grid North, this shall be clearly indicated. When Grid North is used its reference grid meridian shall be identified.

### **7.9 Aeronautical data**

#### **7.9.1 Aerodromes**

All aerodromes used by international civil aviation to which an instrument approach can be made shall be shown.

*Note.— Other aerodromes may be shown.*

7.9.2 Prohibited, restricted and danger areas Prohibited, restricted and danger areas relevant to the layer of airspace, shall be depicted with their identification and vertical limits.

#### **7.9.3 Air traffic services system**



---

7.9.3.1 Where appropriate, the components of the established air traffic services system shall be shown.

7.9.3.1.1 The components shall include the following:

- 1) the radio navigation aids associated with the air traffic services system together with their names, identifications, frequencies and geographical coordinates in degrees, minutes and seconds;
- 2) in respect of DME, additionally the elevation of the transmitting antenna of the DME to the nearest 30 m (100 ft);
- 3) an indication of all designated airspace, including lateral and vertical limits and the appropriate class of airspace;
- 4) all ATS routes for en-route flight including route designators, required navigation performance (RNP) types, the track to the nearest degree in both directions along each segment of the routes and, where applicable, the direction of traffic flow;
- 5) all significant points which define the ATS routes and are not marked by the position of a radio navigation aid, together with their name-codes and geographical coordinates in degrees, minutes and seconds;
- 6) in respect of waypoints defining VOR/DME area navigation routes, additionally,
  - a) the station identification and radio frequency of the reference VOR/DME;
  - b) the bearing to the nearest tenth of a degree and the distance to the nearest two-tenths of a kilometer (tenth of a nautical mile) from the reference VOR/DME, if the waypoint is not collocated with it;
- 7) an indication of all compulsory and “on-request” reporting points and ATS/MET reporting points;
- 8) the distances to the nearest kilometre or nautical mile between significant points constituting turning points or reporting points;

*Note.— Overall distances between radio navigation aids may also be shown.*

- 9) change-over points on route segments defined by reference to very high frequency omnidirectional radio ranges, indicating the distances to the nearest kilometre or nautical mile to the navigation aids;

*Note.— Change-over points established at the midpoint between two aids, or at the intersection of two radials in the case of a route which changes direction between the aids, need not be shown for each route segment if a general statement regarding their existence is made.*

- 10) minimum flight altitudes on ATS routes to the nearest higher 50 metres or 100 feet (see Annex 11, 2.21);
- 11) radio communication facilities listed with their frequencies;
- 12) air defence identification zone (ADIZ) properly identified.

*Note.— ADIZ procedures may be described in the chart legend.*

#### 7.9.4 Supplementary information

7.9.4.1 Details of departure and arrival routes and associated holding patterns in terminal areas shall be shown unless they are shown on an Area Chart, a Standard Departure Chart — Instrument (SID) - ICAO or a Standard Arrival Chart - Instrument (STAR) - ICAO.

*Note 1.— For specifications of these charts see Chapters 8, 9 and 10.*

*Note 2.— Departure routes normally originate at the end of a runway; arrival routes normally terminate at the point where an instrument approach is initiated.*

7.9.4.2 Where established, altimeter setting regions shall be shown and identified.

## **CHAPTER 8 AREA CHART — ICAO**

### **8.1 Function**

This chart shall provide the flight crew with information to facilitate the following phases of instrument flight:

- a) the transition between the en-route phase and approach to an aerodrome;
- b) the transition between take-off/missed approach and enroute phase of flight; and
- c) flights through areas of complex ATS routes or airspace structure.

*Note – The function described in 8.1 c) may be satisfied by a separate chart or an inset on an Enroute Chart - ICAO.*

### **8.2 Availability**

8.2.1 The Area Chart - ICAO shall be made available in the manner prescribed in 1.3.2 where the air traffic services routes or position reporting requirements are complex and cannot be adequately shown on an Enroute Chart - ICAO.

8.2.2 Where air traffic services routes or position reporting requirements are different for arrivals and for departures, and these cannot be shown with sufficient clarity on one chart, separate charts shall be provided.

*Note.— Under certain conditions a Standard Departure Chart — Instrument (SID) — ICAO and a Standard Arrival Chart — Instrument (STAR) — ICAO may have to be provided (see Chapters 9 and 10).*

### **8.3 Coverage and scale**

8.3.1 The coverage of each chart shall extend to points that effectively show departure and arrival routes.

8.3.2 The chart shall be drawn to scale and a scale-bar shown.

### **8.4 Projection**

8.4.1 It is recommended that a conformal projection on which a straight line approximates a great circle should be used.

8.4.2 Parallels and meridians shall be shown at suitable intervals.

8.4.3 Graduation marks shall be placed at consistent intervals along the neat lines, as appropriate.

### **8.5 Identification**

The chart shall be identified by a name associated with the airspace portrayed.

*Note – The name may be that of the air traffic services centre, the name of the largest city or town situated in the area covered by the chart or the name of the city that the aerodrome serves. Where more than one aerodrome serves the city or town, the name of the aerodrome on which the procedures are based should be added.*

## **8.6 Culture and topography**

8.6.1 Generalized shorelines of all open water areas, large lakes and rivers shall be shown except where they conflict with data more applicable to the function of the chart.

8.6.2 It is recommended that to improve situational awareness in areas where significant relief exists, all relief exceeding 300 m (1 000 ft) above the elevation of the primary aerodrome should be shown by smoothed contour lines, contour values and layer tints printed in brown. Appropriate spot elevations, including the highest elevation within each top contour line, should be shown printed in black. Obstacles should also be shown.

*Note 1 - The next higher suitable contour line appearing on base topographic maps exceeding 300 m (1 000 ft) above the elevation of the primary aerodrome may be selected to start layer tinting.*

*Note 2 - An appropriate brown colour, on which half-tone layer tinting is to be based, is specified in Appendix 3 - Colour Guide for contours and topographic features.*

*Note 3 - Appropriate spot elevations and obstacles are those provided by the procedures specialist.*

## **8.7 Magnetic variation**

The average magnetic variation of the area covered by the chart shall be shown to the nearest degree.

## **8.8 Bearings, tracks and radials**

8.8.1 Bearings, tracks and radials shall be magnetic, except as provided for in 8.8.2.

8.8.2 It is recommended that in areas of high latitude, where it is determined by the appropriate authority that reference to Magnetic North is impractical, another suitable reference, i.e. True North or Grid North, should be used.

8.8.3 Where bearings, tracks or radials are given with reference to True North or Grid North, this shall be clearly indicated. When Grid North is used, its reference grid meridian shall be identified.

## **8.9 Aeronautical data**

### **8.9.1 Aerodromes**

All aerodromes which affect the terminal routings shall be shown. Where appropriate a runway pattern symbol shall be used.

8.9.2 Prohibited, restricted and danger areas Prohibited, restricted and danger areas shall be depicted with their identification and vertical limits.

8.9.3 Area minimum altitudes Area minimum altitudes shall be shown within quadrilaterals

formed by the parallels and meridians.

*Note.— Depending on the selected chart scale, quadrilaterals formed by the parallels and meridians normally correspond to the whole degree of latitude and longitude.*

#### 8.9.4 Air traffic services system

8.9.4.1 The components of the established relevant air traffic services system shall be shown.

8.9.4.1.1 The components shall include the following:

- 1) the radio navigation aids associated with the air traffic services system together with their names, identifications, frequencies and geographical coordinates in degrees, minutes and seconds;
- 2) in respect of DME, additionally the elevation of the transmitting antenna of the DME to the nearest 30 m (100 ft);
- 3) terminal radio aids which are required for outbound and inbound traffic and for holding patterns;
- 4) the lateral and vertical limits of all designated airspace and the appropriate class of airspace;
- 5) holding patterns and terminal routings, together with the route designators, and the track to the nearest degree along each segment of the prescribed airways and terminal routings;
- 6) all significant points which define the terminal routings and are not marked by the position of a radio navigation aid, together with their name-codes and geographical coordinates in degrees, minutes and seconds;
- 7) in respect of waypoints defining VOR/DME area navigation routes, additionally,
  - a) the station identification and radio frequency of the reference VOR/DME;
  - b) the bearing to the nearest tenth of a degree and the distance to the nearest two-tenths of a kilometer (tenth of a nautical mile) from the reference VOR/DME, if the waypoint is not collocated with it;
- 8) an indication of all compulsory and “on-request” reporting points;
- 9) the distances to the nearest kilometre or nautical mile between significant points constituting turning points or reporting points;

*Note.— Overall distances between radio navigation aids may also be shown.*

- 10) change-over points on route segments defined by reference to very high frequency omnidirectional radio ranges, indicating the distances to the nearest kilometre or nautical mile to the radio navigation aids;

---

*Note.— Change-over points established at midpoint between two aids, or at the intersection of two radials in the case of a route which changes direction between the aids, need not be shown for each route segment if a general statement regarding their existence is made.*

- 11) minimum flight altitudes on ATS routes to the nearest higher 50 m or 100 ft (see MCAR 11,);
- 12) established radar minimum altitudes to the nearest higher 50 m or 100 ft, clearly identified;

*Note 1.— Where radar procedures are used to vector aircraft to or from significant points on a*

*published standard departure or arrival route or to issue clearance for descent below the minimum sector altitude during arrival, the radar procedures may be shown on the Area Chart — ICAO unless excessive chart clutter will result.*

*Note 2.— Where excessive chart clutter will result, a Radar Minimum Altitude Chart — ICAO may be provided (see Chapter 21), in which case the elements indicated by 8.9.4.1.1, 12), need not be duplicated on the Area Chart — ICAO.*

- 13) area speed and level/altitude restrictions where established;
- 14) radio communication facilities listed with their frequencies.

## **CHAPTER 9 STANDARD DEPARTURE CHART — INSTRUMENT (SID) — ICAO**

### **9.1 Function**

This chart shall provide the flight crew with information to enable it to comply with the designated standard departure route — instrument from take-off phase to the enroute phase.

*Note 1.— Provisions governing the identification of standard departure routes are in Annex 11, Appendix 3; guidance material relating to the establishment of such routes is contained in the Air Traffic Services Planning Manual (ICAO Doc 9426).*

*Note 2.— Provisions governing obstacle clearance criteria and details of the minimum information to be published are contained in the Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS, ICAO Doc 8168), Volume II, Part II.)*

### **9.2 Availability**

The Standard Departure Chart — Instrument (SID) — ICAO shall be made available wherever a standard departure route — instrument has been established and cannot be shown with sufficient clarity on the Area Chart — ICAO.

### **9.3 Coverage and scale**

9.3.1 The coverage of the chart shall be sufficient to indicate the point where the departure route begins and the specified significant point at which the en-route phase of flight along a designated air traffic services route can be commenced.

*Note.— The departure route normally originates at the end of a runway.*

9.3.2 It is recommended that the chart should be drawn to scale.

9.3.3 If the chart is drawn to scale, a scale-bar shall be shown.

9.3.4 When the chart is not drawn to scale the annotation “NOT TO SCALE” shall be shown and the symbol for scale break shall be used on tracks and other aspects of the chart which are too large to be drawn to scale.

### **9.4 Projection**

9.4.1 It is recommended that a conformal projection on which a straight line approximates a great circle should be used.

9.4.2 It is recommended that when the chart is drawn to scale, parallels and meridians should be shown at suitable intervals.

9.4.3 Graduation marks shall be placed at consistent intervals along the neat lines.

## **9.5 Identification**

The chart shall be identified by the name of the city or town, or area, which the aerodrome serves, the name of the aerodrome and the identification of the standard departure route(s) - instrument as established in accordance with the *Procedures for Air Navigation Services Aircraft Operations* (PANS-OPS, ICAO Doc 8168), Volume II, Part II, Chapter 5.

*Note – The identification of the standard departure route(s) — instrument is provided by the procedures specialist.*

## **9.6 Culture and topography**

9.6.1 Where the chart is drawn to scale, generalized shore lines of all open water areas, large lakes and rivers shall be shown except where they conflict with data more applicable to the function of the chart.

9.6.2 It is recommended that to improve situational awareness in areas where significant relief exists, the chart should be drawn to scale and all relief exceeding 300 m (1 000 ft) above the aerodrome elevation should be shown by smoothed contour lines, contour values and layer tints printed in brown. Appropriate spot elevations, including the highest elevation within each top contour line, should be shown printed in black. Obstacles should also be shown.

*Note 1.— The next higher suitable contour line appearing on base topographic maps exceeding 300 m (1 000 ft) above the aerodrome elevation may be selected to start layer tinting.*

*Note 2.— An appropriate brown colour, on which half-tone layer tinting is to be based, is specified in Appendix 3 — Colour Guide for contours and topographic features.*

*Note 3.— Appropriate spot elevations and obstacles are those provided by the procedures specialist.*

## **9.7 Magnetic variation**

Magnetic variation used in determining the magnetic bearings, tracks and radials shall be shown to the nearest degree.

## **9.8 Bearings, tracks and radials**

9.8.1 Bearings, tracks and radials shall be magnetic, except as provided for in 9.8.2.

*Note.— A note to this effect may be included on the chart.*

9.8.2 It is recommended that in areas of high latitude, where it is determined by the appropriate authority that reference to Magnetic North is impractical, another suitable reference, i.e. True North or Grid North, should be used.



9.8.3 Where bearings, tracks or radials are given with reference to True North or Grid North, this shall be clearly indicated. When Grid North is used its reference grid meridian shall be identified.

## **9.9 Aeronautical data**

### 9.9.1 Aerodromes

9.9.1.1 The aerodrome of departure shall be shown by the runway pattern.

9.9.1.2 All aerodromes which affect the designated standard departure route — instrument shall be shown and identified. Where appropriate the aerodrome runway patterns shall be shown.

9.9.2 Prohibited, restricted and danger areas Prohibited, restricted and danger areas which may affect the execution of the procedures shall be shown with their identification and vertical limits.

### 9.9.3 Minimum sector altitude

9.9.3.1 The established minimum sector altitude, based on a navigation aid associated with the procedure, shall be shown with a clear indication of the sector to which it applies.

9.9.3.2 Where the minimum sector altitude has not been established, the chart shall be drawn to scale and area minimum altitudes shall be shown within quadrilaterals formed by the parallels and meridians. Area minimum altitudes shall also be shown in those parts of the chart not covered by the minimum sector altitude.

*Note.— Depending on the selected chart scale, quadrilaterals formed by the parallels and meridians normally correspond to the half-degree of latitude and longitude.*

### 9.9.4 Air traffic services system

9.9.4.1 The components of the established relevant air traffic services system shall be shown.

9.9.4.1.1 The components shall comprise the following:

- 1) a graphic portrayal of each standard departure route — instrument, including:
  - a) route designator;
  - b) significant points defining the route;
  - c) track or radial to the nearest degree along each segment of the route;
  - d) distances to the nearest kilometre or nautical mile between significant points;
  - e) minimum flight altitudes along the route or route segments and altitudes required by the procedure to the nearest higher 50 m or 100 ft and flight level restrictions where established;
  - f) where the chart is drawn to scale and radar vectoring on departure is provided, established radar minimum altitudes to the nearest higher 50 m or 100 ft, clearly identified;

---

*Note 1.— Where radar procedures are used to vector aircraft to or from significant points on a published standard departure route, the radar procedures may be shown on the Standard Departure Chart — Instrument (SID) — ICAO unless excessive chart clutter will result.*

*Note 2.— Where excessive chart clutter will result, a Radar Minimum Altitude Chart — ICAO may be provided (see Chapter 21), in which case the elements indicated by 9.9.4.1.1, 1) f), need not be duplicated on the Standard Departure Chart — Instrument (SID) — ICAO.*

- 2) the radio navigation aid(s) associated with the route(s) including:
  - a) plain language name;
  - b) identification;
  - c) frequency;
  - d) geographical coordinates in degrees, minutes and seconds;
  - e) for DME, the channel and the elevation of the transmitting antenna of the DME to the nearest 30 m (100 ft);
  
- 3) the name-codes of the significant points not marked by the position of a radio navigation aid, their geographical coordinates in degrees, minutes and seconds and the bearing to the nearest tenth of a degree and distance to the nearest two-tenths of a kilometre (tenth of a nautical mile) from the reference radio navigation aid;
  
- 4) applicable holding patterns;
  
- 5) transition altitude/height to the nearest higher 300 m or 1 000 ft;
  
- 6) the position and height of close-in obstacles which penetrate the obstacle identification surface (OIS). A note shall be included whenever close-in obstacles penetrating the OIS exist but which were not considered for the published procedure design gradient;
  

*Note.— In accordance with PANS-OPS, Volume II, information on close-in obstacles is provided by the procedures specialist.*

  
- 7) area speed restrictions, where established;
  
- 8) all compulsory and “on-request” reporting points;
  
- 9) radio communication procedures, including:
  - a) call sign(s) of ATS unit(s);
  - b) frequency;
  - c) transponder setting, where appropriate.

9.9.4.2 It is recommended that a textual description of standard departure route(s) — instrument (SID) and communication failure procedures in relation to radar control should be provided and should, whenever feasible, be shown on the chart or on the same page which contains the chart

9.9.4.3 Aeronautical database requirements

Appropriate data to support navigation database coding shall be published in accordance with the *Procedures for Air Navigation Services – Aircraft Operations* (PANS-OPS, Doc 8168), Volume II, Part III, Section 5, Chapter 2, 2.1, on the verso of the chart or as a separate, properly referenced sheet.

*Note – Appropriate data are those provided by the procedures specialist.*

## **CHAPTER 10 STANDARD ARRIVAL CHART – INSTRUMENT (STAR) – ICAO**

### **10.1 Function**

This chart shall provide the flight crew with information to enable it to comply with the designated standard arrival route — instrument from the en-route phase to the approach phase.

*Note 1.— Standard arrival routes — instrument are to be interpreted as including “standard descent profiles”, “continuous descent approach”, and other non-standard descriptions. In the case of a standard descent profile, the depiction of a cross-section is not required.*

*Note 2.— Provisions governing the identification of standard arrival routes are in Annex 11, Appendix 3; guidance material relating to the establishment of such routes is contained in the Air Traffic Services Planning Manual (ICAO Doc 9426).*

### **10.2 Availability**

The Standard Arrival Chart — Instrument (STAR) — ICAO shall be made available wherever a standard arrival route — instrument has been established and cannot be shown with sufficient clarity on the Area Chart.

### **10.3 Coverage and scale**

10.3.1 The coverage of the chart shall be sufficient to indicate the points where the en-route phase ends and the approach phase begins.

10.3.2 It is recommended that the *chart should be drawn to scale*.

10.3.3 If the chart is drawn to scale, a scale-bar shall be shown.

10.3.4 When the chart is not drawn to scale the annotation “NOT TO SCALE” shall be shown and the symbol for scale break shall be used on tracks and other aspects of the chart which are too large to be drawn to scale.

### **10.4 Projection**

10.4.1 It is recommended that *a conformal projection on which a straight line approximates a great circle should be used*.

10.4.2 It is recommended that *when the chart is drawn to scale, parallels and meridians should be shown at suitable intervals*.

10.4.3 Graduation marks shall be placed at consistent intervals along the neat lines.

### **10.5 Identification**

The chart shall be identified by the name of the city or town, or area, which the aerodrome serves, the name of the aerodrome, and the identification of the standard arrival route(s) C instrument as established in accordance with the *Procedures for Air Navigation Services — Aircraft Operations* (PANS-OPS, ICAO Doc 8168), Volume II, Part III, Chapter 3.

*Note.— The identification of the standard arrival route(s) — instrument is provided by the procedures specialist.*

## **10.6 Culture and topography**

10.6.1 Where the chart is drawn to scale, generalized shore lines of all open water areas, large lakes and rivers shall be shown except where they conflict with data more applicable to the function of the chart.

10.6.2 It is recommended that to improve situational awareness in areas where significant relief exists, the chart should be drawn to scale and all relief exceeding 300 m (1 000 ft) above the aerodrome elevation should be shown by smoothed contour lines, contour values and layer tints printed in brown. Appropriate spot elevations, including the highest elevation within each top contour line, should be shown printed in black. Obstacles should also be shown.

*Note 1.— The next higher suitable contour line appearing on base topographic maps exceeding 300 m (1 000 ft) above the aerodrome elevation may be selected to start layer tinting.*

*Note 2.— An appropriate brown colour, on which half-tone layer tinting is to be based, is specified in Appendix 3 — Colour Guide for contours and topographic features.*

*Note 3.— Appropriate spot elevations and obstacles are those provided by the procedures specialist.*

## **10.7 Magnetic variation**

Magnetic variation used in determining the magnetic bearings, tracks and radials shall be shown to the nearest degree.

## **10.8 Bearings, tracks and radials**

10.8.1 Bearings, tracks and radials shall be magnetic, except as provided for in 10.8.2.

*Note.— A note to this effect may be included on the chart.*

10.8.2 It is recommended that in areas of high latitude, where it is determined by the appropriate authority that reference to Magnetic North is impractical, another suitable reference, i.e. True North or Grid North, should be used.

10.8.3 Where bearings, tracks or radials are given with reference to True North or Grid North, this shall be clearly indicated. When Grid North is used its reference grid meridian shall be identified.

## **10.9 Aeronautical data**

10.9.1 Aerodromes

10.9.1.1 The aerodrome of landing shall be shown by the runway pattern.

10.9.1.2 All aerodromes which affect the designated standard arrival route — instrument shall be shown and identified. Where appropriate the aerodrome runway patterns shall be shown.

10.9.2 Prohibited, restricted and danger areas Prohibited, restricted and danger areas which may affect the execution of the procedures shall be shown with their identification and vertical limits.

10.9.3 Minimum sector altitude

10.9.3.1 The established minimum sector altitude shall be shown with a clear indication of the sector to which it applies.

10.9.3.2 Where the minimum sector altitude has not been established, the chart shall be drawn to scale and area minimum altitudes shall be shown within quadrilaterals formed by the parallels and meridians. Area minimum altitudes shall also be shown in those parts of the chart not covered by the minimum sector altitude.

*Note.* — Depending on the selected chart scale, quadrilaterals formed by the parallels and meridians normally correspond to the half-degree of latitude and longitude.

10.9.4 Air traffic services system

10.9.4.1 The components of the established relevant air traffic services system shall be shown.

10.9.4.1.1 The components shall comprise the following:

- 1) a graphic portrayal of each standard arrival route — instrument, including:
  - a) route designator;
  - b) significant points defining the route;
  - c) track or radial to the nearest degree along each segment of the route;
  - d) distances to the nearest kilometre or nautical mile between significant points;
  - e) minimum flight altitudes along the route or route segments and altitudes required by the procedure to the nearest higher 50 m or 100 ft and flight level restrictions where established;
  - f) where the chart is drawn to scale and radar vectoring on arrival is provided, established radar minimum altitudes to the nearest higher 50 m or 100 ft, clearly identified;

*Note 1.*— Where radar procedures are used to vector aircraft to or from significant points on a published standard arrival route or to issue clearance for descent below the minimum sector altitude during arrival, the radar procedures may be shown on the Standard Arrival Chart - Instrument (STAR) — ICAO unless excessive chart clutter will result.

*Note 2.*— Where excessive chart clutter will result, a Radar Minimum Altitude Chart — ICAO may be provided (see Chapter 21), in which case the elements indicated by 10.9.4.1.1, 1) f), need not be duplicated on the Standard Arrival Chart — Instrument (STAR) — ICAO.

- 2) the radio navigation aid(s) associated with the route(s) including:
  - a) plain language name;
  - b) identification;
  - c) frequency;
  - d) geographical coordinates in degrees, minutes and seconds;
  - e) for DME, the channel and the elevation of the transmitting antenna of the DME to the nearest 30 m (100 ft);
  
- 3) the name-codes of the significant points not marked by the position of a radio navigation aid, their geographical coordinates in degrees, minutes and seconds and the bearing to the nearest tenth of a degree and distance to the nearest two-tenths of a kilometre (tenth of a nautical mile) from the reference radio navigation aid;
  
- 4) applicable holding patterns;
  
- 5) transition altitude/height to the nearest higher 300 m or 1 000 ft;
  
- 6) area speed restrictions, where established;
  
- 7) all compulsory and “on-request” reporting points;
  
- 8) radio communication procedures, including:
  - a) call sign(s) of ATS unit(s);
  - b) frequency;
  - c) transponder setting, where appropriate.

10.9.4.2. It is recommended that a textual description of standard arrival route(s) — instrument (STAR) and communication failure procedures in relation to radar control should be provided and should, whenever feasible, be shown on the chart or on the same page which contains the chart.

#### 10.9.4.3 Aeronautical database requirements

Appropriate data to support navigation database coding shall be published in accordance with the *Procedures for Air Navigation Services – Aircraft Operations* (PANS-OPS, Doc 8168), Volume II, Part III, Section 5, Chapter 2, 2.2, on the verso of the chart or as a separate, properly referenced sheet.

*Note – Appropriate data are those provided by the procedures specialist.*

## **CHAPTER 11 INSTRUMENT APPROACH CHART — ICAO**

### **11.1 Function**

This chart shall provide flight crews with information which will enable them to perform an approved instrument approach procedure to the runway of intended landing including the missed approach procedure and where applicable, associated holding patterns.

*Note.— Detailed criteria for the establishment of instrument approach procedures and the resolutions of associated altitudes/heights are contained in the Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS, ICAO Doc 8168).*

### **11.2 Availability**

11.2.1 Instrument Approach Charts — ICAO shall be made available for all aerodromes used by international civil aviation where instrument approach procedures have been established by the State concerned.

11.2.2 A separate Instrument Approach Chart — ICAO shall normally be provided for each precision approach procedure established by the State.

11.2.3 A separate Instrument Approach Chart — ICAO shall normally be provided for each non-precision approach procedure established by the State.

*Note - A single precision or non-precision approach procedure chart may be provided to portray more than one approach procedure when the procedures for the intermediate approach, final approach and missed approach segments are identical.*

11.2.4 When the values for track, time or altitude differ between categories of aircraft on other than the final approach segment of the instrument approach procedures and the listing of these differences on a single chart could cause clutter or confusion, more than one chart shall be provided.

*Note.— For categories of aircraft, see Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS, ICAO Doc 8168), Volume II, Part III, Chapter 1.*

11.2.5 Instrument Approach Charts - ICAO shall be revised whenever information essential to safe operation becomes out of date.

### **11.3 Coverage and scale**

11.3.1 The coverage of the chart shall be sufficient to include all segments of the instrument approach procedure and such additional areas as may be necessary for the type of approach intended.

11.3.2 The scale selected shall ensure optimum legibility consistent with:

- 1) the procedure shown on the chart;
- 2) sheet size.

11.3.3 A scale indication shall be given.



11.3.3.1 Except where this is not practicable, a distance circle with a radius of 20 km (10 NM) centred on a DME located on or close to the aerodrome, or on the aerodrome reference point where no suitable DME is available, shall be shown; its radius shall be indicated on the circumference.

11.3.3.2 It is recommended that a distance scale should be shown directly below the profile.

#### **11.4 Format**

It is recommended that the sheet size should be 210 × 148 mm (8.27 × 5.82 in).

#### **11.5 Projection**

11.5.1 A conformal projection on which a straight line approximates a great circle shall be used.

11.5.2 It is recommended that graduation marks should be placed at consistent intervals along the neat lines.

#### **11.6 Identification**

The chart shall be identified by the name of the city or town, or area, which the aerodrome serves, the name of the aerodrome and the identification of the instrument approach procedure as established in accordance with the *Procedures for Air Navigation Services — Aircraft Operations* (PANS-OPS, ICAO Doc 8168), Volume II, Part III, Chapter 1.

*Note.— The identification of the instrument approach procedure is provided by the procedures specialist.*

#### **11.7 Culture and topography**

11.7.1 Culture and topographic information pertinent to the safe execution of the instrument approach procedure, including the missed approach procedure, associated holding procedures and visual manoeuvring (circling) procedure when established, shall be shown. Topographic information shall be named, only when necessary, to facilitate the understanding of such information, and the minimum shall be a delineation of land masses and significant lakes and rivers.

11.7.2 Relief shall be shown in a manner best suited to the particular elevation characteristics of the area. In areas where relief exceeds 1 200 m (4 000 ft) above the aerodrome elevation within the coverage of the chart or 600 m (2 000 ft) within 11 km (6 NM) of the aerodrome reference point or when final approach or missed approach procedure gradient is steeper than optimal due to terrain, all relief exceeding 150 m (500 ft) above the aerodrome elevation shall be shown by smoothed contour lines, contour values and layer tints printed in brown. Appropriate spot elevations, including the highest elevation within each top contour line, shall also be shown printed in black.

*Note 1.— The next higher suitable contour line appearing on base topographic maps exceeding 150 m (500 ft) above the aerodrome elevation may be selected to start layer tinting.*

---

*Note 2.— An appropriate brown colour, on which half-tone layer tinting is to be based, is specified in Appendix 3 — Colour Guide for contours and topographic features.*

*Note 3.— Appropriate spot elevations are those provided by the procedures specialist.*

11.7.3 It is recommended that in areas where relief is lower than specified in 11.7.2, all relief exceeding 150 m (500 ft) above the aerodrome elevation should be shown by smoothed contour lines, contour values and layer tints printed in brown. Appropriate spot elevations, including the highest elevation within each top contour line, should also be shown printed in black.

*Note 1.— The next higher suitable contour line appearing on base topographic maps exceeding 150 m (500 ft) above the aerodrome elevation may be selected to start layer tinting.*

*Note 2.— An appropriate brown colour, on which half-tone layer tinting is to be based, is specified in Appendix 3 — Colour Guide for contours and topographic features.*

*Note 3.— Appropriate spot elevations are those provided by the procedures specialist.*

## **11.8 Magnetic variation**

11.8.1 It is recommended that the magnetic variation should be shown.

11.8.2 When shown, the value of the variation, indicated to the nearest degree, shall agree with that used in determining magnetic bearings, tracks and radials.

## **11.9 Bearings, tracks and radials**

11.9.1 Bearings, tracks and radials shall be magnetic except as provided for in 11.9.2.

*Note.— A note to this effect may be included on the chart.*

11.9.2 It is recommended that in areas of high latitude, where it is determined by the appropriate authority that reference to Magnetic North is impractical, another suitable reference, i.e. True North or Grid North, should be used.

11.9.3 Where bearings, tracks or radials are given with reference to True North or Grid North, this shall be clearly indicated. When Grid North is used its reference grid meridian shall be identified.

## **11.10 Aeronautical data**

### **11.10.1 Aerodromes**

11.10.1.1 All aerodromes which show a distinctive pattern from the air shall be shown by the appropriate symbol. Abandoned aerodromes shall be identified as abandoned.

11.10.1.2 The runway pattern, at a scale sufficiently large to show it clearly, shall be shown for:

1) the aerodrome on which the procedure is based;

2) aerodromes affecting the traffic pattern or so situated as to be likely, under adverse weather conditions, to be mistaken for the aerodrome of intended landing.

11.10.1.3 The aerodrome elevation shall be shown to the nearest metre or foot in a prominent position on the chart.

11.10.1.4 The threshold elevation or, where applicable, the highest elevation of the touchdown zone shall be shown to the nearest metre or foot.

#### 11.10.2 Obstacles

11.10.2.1 Obstacles shall be shown on the plan view of the chart.

*Note.— Appropriate obstacles are those provided by the procedures specialist.*

11.10.2.2 It is recommended that if one or more obstacles are the determining factor of an obstacle clearance altitude/ height, those obstacles should be identified.

11.10.2.3 The elevation of the top of obstacles shall be shown to the nearest (next higher) metre or foot.

11.10.2.4 It is recommended that the heights of obstacles above a datum other than mean sea level (see 11.10.2.3) should be shown. When shown, they should be given in parentheses on the chart.

11.10.2.5 When the heights of obstacles above a datum other than mean sea level are shown, the datum shall be the aerodrome elevation except that, at aerodromes having an instrument runway (or runways) with a threshold elevation more than 2 m (7 ft) below the aerodrome elevation, the chart datum shall be the threshold elevation of the runway to which the instrument approach is related.

11.10.2.6 Where a datum other than mean sea level is used, it shall be stated in a prominent position on the chart.

11.10.2.7 Where an obstacle free zone has not been established for a precision approach runway Category I, this shall be indicated.

11.10.3 Prohibited, restricted and danger areas Prohibited areas, restricted areas, and danger areas which may affect the execution of the procedures shall be shown with their identification and vertical limits.

#### 11.10.4 Radio communication facilities and navigation aids

11.10.4.1 Radio navigation aids required for the procedures together with their frequencies, identifications and track-defining characteristics, if any, shall be shown. In the case of a procedure in which more than one station is located on the final approach track, the facility to be used for track guidance for final approach shall be clearly identified. In addition, consideration shall be given to the elimination from the approach chart of those facilities that are not used by the procedure.

---

11.10.4.2 The initial approach fix (IAF), the intermediate approach fix (IF), the final approach fix (FAF) (or final approach point (FAP) for an ILS approach procedure), the missed approach point (MAPt), where established, and other essential fixes or points comprising the procedure shall be shown and identified.

11.10.4.3 It is recommended that the final approach fix (or final approach point for an ILS approach procedure) should be identified with its geographical coordinates in degrees, minutes and seconds.

11.10.4.4 Radio navigation aids that might be used in diversionary procedures together with their track-defining characteristics, if any, shall be shown or indicated on the chart.

11.10.4.5 Radio communication frequencies, including call signs, that are required for the execution of the procedures shall be shown.

11.10.4.6 When required by the procedures, the distance to the aerodrome from each radio navigation aid concerned with the final approach shall be shown to the nearest kilometer or nautical mile. When no track-defining aid indicates the bearing of the aerodrome, the bearing shall also be shown to the nearest degree.

#### 11.10.5 Minimum sector altitude or terminal arrival altitude

The minimum sector altitude or terminal arrival altitude established by the competent authority shall be shown, with a clear indication of the sector to which it applies

#### 11.10.6 Portrayal of procedure tracks

11.10.6.1 The plan view shall show the following information in the manner indicated:

- a) the approach procedure track by an arrowed continuous line indicating the direction of flight;
- b) the missed approach procedure track by an arrowed broken line;
- c) any additional procedure track, other than those specified in a) and b), by an arrowed dotted line;
- d) bearings, tracks, radials to the nearest degree and distances to the nearest two-tenths of a kilometre or tenth of a nautical mile or times required for the procedure;
- e) where no track-defining aid is available, the magnetic bearing to the nearest degree to the aerodrome from the radio navigation aids concerned with the final approach;
- f) the boundaries of any sector in which visual manoeuvring (circling) is prohibited;
- g) where specified the holding pattern and minimum holding altitude/height associated with the approach and missed approach;
- h) caution notes where required, prominently displayed on the face of the chart.

---

11.10.6.2 It is recommended that *the plan view should show the distance to the aerodrome from each radio navigation aid concerned with the final approach.*

11.10.6.3 A profile shall be provided normally below the plan view showing the following data:

- a) the aerodrome by a solid block at aerodrome elevation;
- b) the profile of the approach procedure segments by an arrowed continuous line indicating the direction of flight;
- c) the profile of the missed approach procedure segment by an arrowed broken line and a description of the procedure;
- d) the profile of any additional procedure segment, other than those specified in b) and c), by an arrowed dotted line;
- e) bearings, tracks, radials to the nearest degree and distances to the nearest two-tenths of a kilometre or tenth of a nautical mile or times required for the procedure;
- f) altitudes/heights required by the procedures, including transition altitude and procedure altitudes/heights, where established;
- g) limiting distance to the nearest kilometre or nautical mile on procedure turn, when specified;
- h) the intermediate approach fix or point, on procedures where no course reversal is authorized;
- i) a line representing the aerodrome elevation or threshold elevation, as appropriate, extended across the width of the chart including a distance scale with its origin at the runway threshold.

11.10.6.4 It is recommended that the heights required by procedures should be shown in parentheses, using the height datum selected in accordance with 11.10.2.5.

11.10.6.5 It is recommended that the profile view should include a ground profile or a minimum altitude/height portrayal as follows:

- a) a ground profile shown by a solid line depicting the highest elevations of the relief occurring within the primary area of the final approach segment. The highest elevations of the relief occurring in the secondary areas of the final approach segment shown by a dashed line; or
- b) minimum altitudes/heights in the intermediate and final approach segments indicated within bounded shaded blocks.

*Note 1.— For the ground profile portrayal, actual templates of the primary and secondary areas of the final approach segment are provided to the cartographer by the procedures specialist.*

*Note 2.— The minimum altitude/height portrayal is intended for use on charts depicting non-precision approaches with a final approach fix.*

11.10.7 Aerodrome operating minima

11.10.7.1 Aerodrome operating minima when established shall be shown.

11.10.7.2 The obstacle clearance altitudes/heights for the aircraft categories for which the procedure is designed shall be shown; for precision approach procedures, additional OCA/H for Cat DL aircraft (wing span between 65 m and 80 m and/or vertical distance between the flight path of the wheels and the glide path antenna between 7 m and 8 m) shall be published, when necessary.

#### 11.10.8 Supplementary information

##### 11.10.8.1 When the missed approach point is defined by:

- a distance from the final approach fix, or
- a facility or a fix and the corresponding distance from the final approach fix, the distance to the nearest two-tenths of a kilometre or tenth of a nautical mile and a table showing ground speeds and times from the final approach fix to the missed approach point shall be shown.

11.10.8.2 When DME is required for use in the final approach segment, a table showing altitudes/heights for each 2 km or 1 NM, as appropriate, shall be shown. The table shall not include distances which would correspond to altitudes/ heights below the OCA/H.

11.10.8.3 It is recommended that for procedures in which DME is not required for use in the final approach segment but where a suitably located DME is available to provide advisory descent profile information, a table showing the altitudes/ heights should be included.

11.10.8.4 It is recommended that a rate of descent table should be shown.

11.10.8.5 For non-precision approach procedures with a final approach fix, the final approach descent gradient to the nearest one-tenth of a per cent and, in parentheses, descent angle to the nearest one-tenth of a degree shall be shown.

11.10.8.6 For precision approach procedures and approach procedures with vertical guidance, the reference datum height to the nearest half metre or foot and the glide path/elevation/vertical path angle to the nearest one-tenth of a degree shall be shown.

11.10.8.7 When a final approach fix is specified at the final approach point for ILS, a clear indication shall be given whether it applies to the ILS, the associated ILS localizer only procedure, or both. In the case of MLS, a clear indication shall be given when an FAF has been specified at the final approach point.

11.10.8.8 If the final approach descent gradient/angle for any type of instrument approach procedure exceeds the maximum value specified in the *Procedures for Air Navigation Services Aircraft Operations* (PANS-OPS, Doc 8168), Volume II, Part I, Section 4, Chapter 5, a cautionary note shall be included.

##### 11.10.9 Aeronautical database requirements

Appropriate data to support navigation database coding shall be published in accordance with the *Procedures for Air Navigation Services — Aircraft Operations* (PANS-OPS, Doc 8168), Volume II, Part III, Section 5, Chapter 2, 2.3 for RNAV procedures and Volume II, Part I, Section 4, Chapter 9, 9.4.1.4 for non-RNAV procedures, on the verso of the chart or as a separate, properly referenced sheet.

*Note – Appropriate data are those provided by the procedures specialist.*

## CHAPTER 12 VISUAL APPROACH CHART — ICAO

### 12.1 Function

This chart shall provide flight crews with information, which will enable them to transit from the en-route/descent to approach phases of flight to the runway of intended landing by means of visual reference.

### 12.2 Availability

The Visual Approach Chart — ICAO shall be made available in the manner prescribed in 1.3.2 for all aerodromes used by international civil aviation where:

- 1) only limited navigation facilities are available; or
- 2) radio communication facilities are not available; or
- 3) no adequate aeronautical charts of the aerodrome and its surroundings at 1:500 000 or greater scale are available; or
- 4) visual approach procedures have been established.

### 12.3 Scale

12.3.1 The scale shall be sufficiently large to permit depiction of significant features and indication of the aerodrome layout.

12.3.2 It is recommended that *the* scale should not be smaller than 1:500 000.

*Note.— A scale of 1:250 000 or 1:200 000 is preferred.*

12.3.3 It is recommended that when an Instrument Approach Chart is available for a given aerodrome, the Visual Approach Chart should be drawn to the same scale.

### 12.4 Format

It is recommended that *the* sheet size should be 210 × 148 mm (8.27 × 5.82 in).

*Note.— It would be advantageous to print the charts in several colours, selected to provide maximum legibility in varying degrees and kinds of light.*

### 12.5 Projection

12.5.1 A conformal projection on which a straight line approximates a great circle shall be used.

12.5.2 It is recommended that graduation *marks should be placed at consistent intervals along the neat lines.*

### 12.6 Identification

The chart shall be identified by the name of the city or town which the aerodrome serves and the name of the aerodrome.

### **12.7 Culture and topography**

12.7.1 Natural and cultural landmarks shall be shown (e.g. bluffs, cliffs, sand dunes, cities, towns, roads, railroads, isolated lighthouses, etc.).

12.7.1.1 It is recommended that the geographical place names should be included only when they are required to avoid confusion or ambiguity.

12.7.2 Shore lines, lakes, rivers and streams shall be shown.

12.7.3 Relief shall be shown in a manner best suited to the particular elevation and obstacle characteristics of the area covered by the chart.

12.7.4 It is recommended that when shown, spot elevations should be carefully selected.

*Note.— The value of certain spot elevations/heights in relation to both mean sea level and aerodrome elevation may be given.*

12.7.5 The figures relating to different reference levels shall be clearly differentiated in their presentation.

### **12.8 Magnetic variation**

The magnetic variation shall be shown.

### **12.9 Bearings, tracks and radials**

12.9.1 Bearings, tracks and radials shall be magnetic except as provided for in 12.9.2.

12.9.2 Where bearings, tracks or radials are given with reference to True North or Grid North, this shall be clearly indicated. When Grid North is used its reference grid meridian shall be identified.

### **12.10 Aeronautical data**

#### **12.10.1 Aerodromes**

12.10.1.1 All aerodromes shall be shown by the runway pattern. Restrictions on the use of any landing direction shall be indicated. Where there is any risk of confusion between two neighboring aerodromes this shall be indicated. Abandoned aerodromes shall be identified as abandoned.

12.10.1.2 The aerodrome elevation shall be shown in a prominent position on the chart.

#### **12.10.2 Obstacles**

12.10.2.1 Obstacles shall be shown and identified.

12.10.2.2 The elevation of the top of obstacles shall be shown to the nearest (next higher) metre or foot.

12.10.2.3 It is recommended that the heights of obstacles above the aerodrome elevation should be shown.

12.10.2.3.1 When the heights of obstacles are shown, the height datum shall be stated in a prominent position on the chart and the heights shall be given in parentheses on the chart.

#### **12.10.3 Prohibited, restricted and danger areas**

Prohibited areas, restricted areas, and danger areas shall be depicted with their identification and vertical limits.



12.10.4 Designated airspace

Where applicable, control zones and aerodrome traffic zones shall be depicted with their vertical limits and the appropriate class of airspace.

12.10.5 Visual approach information

12.10.5.1 Visual approach procedures shall be shown where applicable.

12.10.5.2 Visual aids for navigation shall be shown as appropriate.

12.10.5.3 Location and type of the visual approach slope indicator systems with their nominal approach slope angle(s), minimum eye height(s) over the threshold of the on-slope signal(s), and where the axis of the system is not parallel to the runway centre line, the angle and direction of displacement, i.e. left or right, shall be shown.

12.10.6 Supplementary information

12.10.6.1 Radio navigation aids together with their frequencies and identifications shall be shown as appropriate.

12.10.6.2 Radio communication facilities with their frequencies shall be shown as appropriate.

## **CHAPTER 13 AERODROME/HELIPORT CHART - ICAO**

### **13.1 Function**

This chart shall provide flight crews with information which will facilitate the ground movement of aircraft:

- a) from the aircraft stand to the runway; and
- b) from the runway to the aircraft stand;

and helicopter movement:

- a) from the helicopter stand to the touchdown and lift-off area and to the final approach and take-off area;
- b) from the final approach and take-off area to the touchdown and lift-off area and to the helicopter stand;
- c) along helicopter ground and air taxiways; and
- d) along air transit routes;

it shall also provide essential operational information at the aerodrome/heliport.

### **13.2 Availability**

13.2.1 The Aerodrome/Heliport Chart - ICAO shall be made available in the manner prescribed in 1.3.2 for all aerodromes/heliports regularly used by international civil aviation.

13.2.2 It is recommended that the Aerodrome/Heliport Chart - ICAO should be made available also, in the manner prescribed in 1.3.2, for all other aerodromes/heliports available for use by international civil aviation.

*Note - Under certain conditions an Aerodrome Ground Movement Chart - ICAO and an Aircraft Parking/Docking Chart - ICAO may have to be provided (see Chapters 14 and 15); in which case, the elements portrayed on these supplementary charts need not be duplicated on the Aerodrome/ Heliport Chart - ICAO.*

### **13.3 Coverage and scale**

13.3.1 The coverage and scale shall be sufficiently large to show clearly all the elements listed in 13.6.1.

13.3.2 A linear scale shall be shown.

### **13.4 Identification**

The chart shall be identified by the name of the city or town, or area, which the aerodrome/heliport serves and the name of the aerodrome/heliport.

### **13.5 Magnetic variation**

True and Magnetic North arrows and magnetic variation to the nearest degree and annual change of the magnetic variation shall be shown.

### **13.6 Aerodrome/heliport data**

13.6.1 This chart shall show:

- a) geographical coordinates in degrees, minutes and seconds for the aerodrome/heliport reference point;
- b) elevations, to the nearest metre or foot, of the aerodrome/heliport and apron (altimeter checkpoint locations) where applicable; and for non-precision approaches, elevations and geoid undulations of runway thresholds and the geometric centre of the touchdown and lift-off area;
- c) elevations and geoid undulations, to the nearest halfmetre or foot, of the precision approach runway threshold, the geometric centre of the touchdown and lift-off area, and at the highest elevation of the touchdown zone of a precision approach runway;
- d) all runways including those under construction with designation number, length and width to the nearest metre, bearing strength, displaced thresholds, stopways, clearways, runway directions to the nearest degree magnetic, type of surface and runway markings;

*Note - Bearing strengths may be shown in tabular form on the face or verso of the chart.*

- e) all aprons, with aircraft/helicopter stands, lighting, markings and other visual guidance and control aids, where applicable, including location and type of visual docking guidance systems, type of surface for heliports, and bearing strengths or aircraft type restrictions where the bearing strength is less than that of the associated runways;

*Note – Bearing strengths or aircraft type restrictions may be shown in tabular form on the face or verso of the chart.*

- f) geographical coordinates in degrees, minutes and seconds for thresholds, geometric centre of touchdown and lift-off area and/or thresholds of the final approach and take-off area (where appropriate);
- g) all taxiways, helicopter air and ground taxiways with type of surface, helicopter air transit routes, with designations, width, lighting, markings (including runway-holding positions and, where established, intermediate holding positions), stop bars, other visual guidance and control aids, and bearing strength or aircraft type restrictions where the bearing strength is less than that of the associated runways;

*Note – Bearing strengths or aircraft type restrictions may be shown in tabular form on the face or verso of the chart.*

- h) where established, hot spot locations with additional information properly annotated;

*Note – Additional information regarding hot spots may be shown in tabular form on the face or verso of the chart.*

- i) geographical coordinates in degrees, minutes, seconds and hundredths of seconds for appropriate taxiway centre line points and aircraft stands;

- j) where established, standard routes for taxiing aircraft with their designators;
- k) the boundaries of the air traffic control service;
- l) position of runway visual range (RVR) observation sites;
- m) approach and runway lighting;
- n) location and type of the visual approach slope indicator systems with their nominal approach slope angle(s), minimum eye height(s) over the threshold of the on-slope signal(s), and where the axis of the system is not parallel to the runway centre line, the angle and direction of the displacement, i.e. left or right;
- o) relevant communication facilities listed with their channels and, if applicable, logon address;
- p) obstacles to taxiing;
- q) aircraft servicing areas and buildings of operational significance;
- r) VOR checkpoint and radio frequency of the aid concerned;
- s) any part of the depicted movement area permanently unsuitable for aircraft, clearly identified as such.

13.6.2 In addition to the items in 13.6.1 relating to heliports, the chart shall show:

- a) heliport type;

*Note.— Heliport types as identified in ICAO Annex 14, Volume II, are yet to be promulgated as surface-level, elevated or helideck.*

- b) touchdown and lift-off area including dimensions to the nearest metre, slope, type of surface and bearing strength in tonnes;

- c) final approach and take-off area including type, true bearing to the nearest degree, designation number (where appropriate), length and width to the nearest metre, slope and type of surface;

- e) safety area including length, width and type of surface;

- e) helicopter clearway including length and ground profile;

- f) obstacles including type and elevation of the top of the obstacles to the nearest (next higher) metre or foot;

- g) visual aids for approach procedures, marking and lighting of final approach and take-off area, and of touchdown and lift-off area;

- h) declared distances to the nearest metre for heliports, where relevant, including:

- 1) take-off distance available;
  - 2) rejected take-off distance available;

3) landing distance available.

## **CHAPTER 14 AERODROME GROUND MOVEMENT CHART - ICAO**

### **14.1 Function**

This supplementary chart shall provide flight crews with detailed information to facilitate the ground movement of aircraft to and from the aircraft stands and the parking/docking of aircraft.

### **14.2 Availability**

It is recommended that the Aerodrome Ground Movement Chart - ICAO should be made available in the manner prescribed in 1.3.2 where, due to congestion of information, details necessary for the ground movement of aircraft along the taxiways to and from the aircraft stands cannot be shown with sufficient clarity on the Aerodrome/Heliport Chart - ICAO.

### **14.3 Coverage and scale**

14.3.1 The coverage and scale shall be sufficiently large to show clearly all the elements listed in 14.6.

14.3.2 It is recommended that a linear scale should be shown.

### **14.4 Identification**

The chart shall be identified by the name of the city or town, or area, which the aerodrome serves and the name of the aerodrome.

### **14.5 Magnetic variation**

14.5.1 A True North arrow shall be shown.

14.5.2 It is recommended that the Magnetic variation to the nearest degree and its annual change should be shown.

*Note.— This chart need not be True North orientated.*

### **14.6 Aerodrome data**

This chart shall show in a similar manner all the information on the Aerodrome/Heliport Chart – ICAO relevant to the area depicted, including:

- a) apron elevation to the nearest metre or foot;
- b) aprons with aircraft stands, bearing strengths or aircraft type restrictions, lighting, marking and other visual guidance and control aids, where applicable, including location and type of visual docking guidance systems;
- c) geographical coordinates in degrees, minutes, seconds and hundredths of seconds for aircraft stands;

---

d) taxiways with designations, width to the nearest metre, bearing strength or aircraft type restrictions where applicable, lighting, markings (including runway-holding positions and, where established, intermediate holding positions), stop bars, and other visual guidance and control aids;

e) where established, hot spot locations with additional information properly annotated;

*Note – Additional information regarding hot spots may be shown in tabular form on the face or verso of the chart.*

f) where established, standard routes for taxiing aircraft, with their designators;

g) geographical coordinates in degrees, minutes, seconds and hundredths of seconds for appropriate taxiway centre line points;

h) the boundaries of the air traffic control service;

i) relevant communication facilities listed with their channels and, if applicable, logon address;

j) obstacles to taxiing;

k) aircraft servicing areas and buildings of operational significance;

l) VOR checkpoint and radio frequency of the aid concerned;

m) any part of the depicted movement area permanently unsuitable for aircraft, clearly identified as such.

## CHAPTER 15. AIRCRAFT PARKING/DOCKING CHART - ICAO

### 15.1 Function

This supplementary chart shall provide flight crews with detailed information to facilitate the ground movement of aircraft between the taxiways and the aircraft stands and the parking/docking of aircraft.

### 15.2 Availability

It is recommended that the Aircraft Parking/ Docking Chart - ICAO should be made available in the manner prescribed in 1.3.2 where, due to the complexity of the terminal facilities, the information cannot be shown with sufficient clarity on the Aerodrome/Heliport Chart - ICAO or on the Aerodrome Ground Movement Chart - ICAO.

### 15.3 Coverage and scale

15.3.1 The coverage and scale shall be sufficiently large to show clearly all the elements listed in 15.6.

15.3.2 It is recommended that a linear scale should be shown.

### 15.4 Identification

The chart shall be identified by the name of the city or town, or area, which the aerodrome serves and the name of the aerodrome.

### 15.5 Magnetic variation

15.5.1 A True North arrow shall be shown.

15.5.2 It is recommended that magnetic variation to the nearest degree and its annual change should be shown.

*Note.— This chart need not be True North orientated.*

### 15.6 Aerodrome data

This chart shall show in a similar manner all the information on the Aerodrome/Heliport Chart — ICAO and the Aerodrome Ground Movement Chart — ICAO relevant to the area depicted, including:

- a) apron elevation to the nearest metre or foot;
- b) aprons with aircraft stands, bearing strengths or aircraft type restrictions, lighting, marking and other visual guidance and control aids, where applicable, including location and type of visual docking guidance systems;
- c) geographical coordinates in degrees, minutes, seconds and hundredths of seconds for aircraft stands;
- d) taxiway entries with designations, including runway holding positions and stop bars;



- e) geographical coordinates in degrees, minutes, seconds and hundredths of seconds for appropriate taxiway centre line points;
- f) the boundaries of the air traffic control service;
- g) relevant radio communication facilities listed with their frequencies;
- h) obstacles to taxiing;
- i) aircraft servicing areas and buildings of operational significance;
- j) VOR checkpoint and radio frequency of the aid concerned;
- k) any part of the depicted movement area permanently unsuitable for aircraft, clearly identified as such.

## CHAPTER 16. WORLD AERONAUTICAL CHART - ICAO 1:1 000 000

### 16.1 Function

This chart shall provide information to satisfy the requirements of visual air navigation.

*Note.— This chart may also serve:*

1) *as a basic aeronautical chart:*

*a) when highly specialized charts lacking visual information do not provide essential data;*

*b) to provide complete world coverage at a constant scale with a uniform presentation of planimetric data;*

*c) in the production of other charts required by international civil aviation;*

2) *as a pre-flight planning chart.*

### 16.2 Availability

16.2.1 The World Aeronautical Chart — ICAO 1:1 000 000 shall be made available in the manner prescribed in 1.3.2 for all areas delineated in Appendix 5.

*Note.— When operational or chart production considerations indicate that operational requirements can be effectively satisfied by Aeronautical Charts — ICAO 1:500 000 or Aeronautical Navigation Charts — ICAO Small Scale, either of these charts may be made available instead of the basic 1:1 000 000 chart.*

16.2.2 It is recommended that to ensure complete coverage of all land areas and adequate continuity in any one coordinated series, the selection of a scale of other than 1:1 000 000 should be determined by regional agreement.

### 16.3 Scales

16.3.1 Linear scales for kilometres and nautical miles arranged in the following order:

- kilometres,
- nautical miles,

with their zero points in the same vertical line shall be shown in the margin.

16.3.1.1 It is recommended that the length of the linear scales should represent at least 200 km (110 NM).

16.3.2 A conversion scale (metres/feet) shall be shown in the margin.

### 16.4 Format

16.4.1 *The language for title and marginal notes would only be in English language.*

16.4.2 The information regarding the number of the adjoining sheets and the unit of measurement to express elevations shall be so located as to be clearly visible when the sheet is folded.

16.4.3 It is recommended that the method of folding should be as follows:

Fold the chart on the long axis, near the mid-parallel of latitude, face out; with the bottom half of the chart face upward, fold inwards near the meridian, and fold both halves backward in accordion folds.

16.4.4 It is recommended that whenever practicable, the sheet lines should conform with those shown in the index in Appendix 5.

*Note 1.— The area covered by a sheet may vary from the lines shown to satisfy particular requirements.*

*Note 2.— The value of adopting identical sheet lines for ICAO 1:1 000 000 Charts and the corresponding sheet of the International Map of the World (IMW), provided aeronautical requirements are not compromised, is recognized.*

16.4.5 The sheet lines used will be notified to ICAO by DGCA for publication in the ICAO *Aeronautical Chart Catalogue* (ICAO Doc 7101).

16.4.6 It is recommended that overlaps should be provided by extending the chart area on the top and right side beyond the area given on the index. This overlap area should contain all aeronautical, topographical, hydrographical and cultural information. The overlap should extend up to 28 km (15 NM) if possible but in any case from the limiting parallels and meridians of each chart to the neat line.

## **16.5 Projection**

16.5.1 The projections shall be as follows:

1) between the Equator and 80° latitude: the Lambert conformal conic projection, in separate bands for each tier of charts. The standard parallels for each 4° band shall be 40' south of the northern parallel and 40' north of the southern parallel;

2) between 80° and 90° latitude: the Polar stereographic projection with scale matching that of the Lambert conformal conic projection at latitude 80°, except that in the northern hemisphere the Lambert conformal conic projection may be used between 80° and 84° latitude and the Polar stereographic projection between 84° and 90° with the scales matching at 84° North.

16.5.2 Graticules and graduations shall be shown as follows:

1) Parallels:

<b>Initial Issue</b>	<i>Latitude</i>	<i>Distance between parallels</i>	<i>Graduations on parallels</i>	<b>01 October 2010</b>
	0° to 72°	30'	1'	

2) Meridians:

<i>Latitude</i>	<i>Interval between meridians</i>	<i>Graduations on meridians</i>
0° to 52°	30'	1'
52° to 72°	30'	1'
		(Only on even numbered meridians)
72° to 84°	1°	1'
84° to 89°	5°	1'
89° to 90°	15°	1'
		(Only on every fourth meridian)

16.5.3 The graduation marks at 1' and 5' intervals shall extend away from the Greenwich Meridian and from the Equator. Each 10' interval shall be shown by a mark on both sides of the graticule line.

16.5.3.1 It is recommended that the length of the graduation marks should be approximately 1.3 mm (0.05 in) for the 1' intervals, and 2 mm (0.08 in) for the 5' intervals and 2 mm (0.08 in) extending on both sides of the graticule line for the 10' intervals.

16.5.4 All meridians and parallels shall be numbered in the borders of the charts. In addition, each parallel shall be numbered within the body of the chart in such a manner that the parallel can be readily identified when the chart is folded.

*Note.— Meridians may be numbered within the body of the chart.*

16.5.5 The name and basic parameters of the projection shall be indicated in the margin.

## **16.6 Identification**

Sheet numbering shall be in conformity with the index in Appendix 5.

*Note.— The corresponding International Map of the World (IMW) sheet number may also be shown.*

## **16.7 Culture and topography**

### **16.7.1 Built-up areas**

16.7.1.1 Cities, towns and villages shall be selected and shown according to their relative importance to visual air navigation.

16.7.1.2 It is recommended that cities and towns of sufficient size should be indicated by the outline of their built-up areas and not of their established city limits.

### **16.7.2 Railroads**

16.7.2.1 All railroads having landmark value shall be shown.

*Note 1.— In congested areas, some railroads may be omitted in the interest of legibility.*

*Note 2.— Railroads may be named where space permits.*

16.7.2.2 It is recommended that important tunnels should be shown.

*Note.— A descriptive note may be added.*

### **16.7.3 Highways and roads**

16.7.3.1 Road systems shall be shown in sufficient detail to indicate significant patterns from the air.

16.7.3.2 It is recommended that roads should not be shown in built-up areas unless they can be distinguished from the air as definite landmarks.

*Note.— The numbers or names of important highways may be shown.*

### **16.7.4 Landmarks**

It is recommended that the natural and cultural landmarks, such as bridges, prominent transmission lines, permanent cable car installations, mine structures, forts, ruins, levees, pipelines, and rocks, bluffs, cliffs, sand dunes, isolated lighthouses, lightships, etc., when considered to be of importance for visual air navigation, should be shown.

*Note.— Descriptive notes may be added.*

### **16.7.5 Political boundaries**

International boundaries shall be shown. Undemarcated and undefined boundaries shall be distinguished by descriptive notes.

#### 16.7.6 Hydrography

16.7.6.1 All water features compatible with the scale of the chart comprising shore lines, lakes, rivers and streams (including those non-perennial in nature), salt lakes, glaciers and ice caps shall be shown.

16.7.6.2 It is recommended that the tint covering large open water areas should be kept very light.

*Note.— A narrow band of darker tone may be used along the shore line to emphasize this feature.*

16.7.6.3 It is recommended that reefs and shoals including rocky ledges, tidal flats, isolated rocks, sand, gravel, stone and all similar areas should be shown by symbols when of significant landmark value.

*Note.— Groups of rocks may be shown by a few representative rock symbols within the area.*

#### 16.7.7 Contours

16.7.7.1 Contours shall be shown. The selection of intervals shall be governed by the requirement to depict clearly the relief features required in air navigation.

16.7.7.2 The values of the contours used shall be shown.

#### 16.7.8 Hypsometric tints

16.7.8.1 When hypsometric tints are used the range of elevations for the tints shall be shown.

16.7.8.2 The scale of the hypsometric tints used on the chart shall be shown in the margin.

#### 16.7.9 Spot elevations

16.7.9.1 Spot elevations shall be shown at selected critical points. The elevations selected shall always be the highest in the immediate vicinity and shall generally indicate the top of a peak, ridge, etc. Elevations in valleys and at lake surface levels which are of special value to the aviator shall be shown. The position of each selected elevation shall be indicated by a dot.

16.7.9.2 The elevation (in metres or feet) of the highest point on the chart and its geographical position to the nearest five minutes shall be indicated in the margin.

16.7.9.3 It is recommended that the spot elevation of the highest point in any sheet should be cleared of hypsometric tinting.

#### 16.7.10 Incomplete or unreliable relief

---

16.7.10.1 Areas that have not been surveyed for contour information shall be labelled “Relief data incomplete”.

16.7.10.2 Charts on which spot elevations are generally unreliable shall bear a warning note prominently displayed on the face of the chart in the colour used for aeronautical information, as follows: “Warning — The reliability of relief information on this chart is doubtful and elevations should be used with caution.”

#### 16.7.11 Escarpments

It is recommended that escarpments should be shown when they are prominent landmarks or when cultural detail is very sparse.

#### 16.7.12 Wooded areas

16.7.12.1 It is recommended that *wooded* areas should be shown.

*Note.— On high latitude charts, the approximate extreme northern or southern limits of tree growth may be shown.*

16.7.12.2 Where shown, the approximate extreme northern or southern limits of tree growth shall be indicated by a dashed black line and shall be appropriately labelled.

#### 16.7.13 Date of topographic information

The date of latest information shown on the topographic base shall be indicated in the margin.

### **16.8 Magnetic variation**

16.8.1 Isogonic lines shall be shown.

16.8.2 The date of the isogonic information shall be indicated in the margin.

### **16.9 Aeronautical data**

16.9.1 Aeronautical data shown shall be kept to a minimum consistent with the use of the chart for visual navigation and the revision cycle (see 16.9.6).

#### 16.9.2 Aerodromes

16.9.2.1 Land and water aerodromes and heliports shall be shown with their names, to the extent that they do not produce undesirable congestion on the chart, priority being given to those of greatest aeronautical significance.

16.9.2.2 The aerodrome elevation, the lighting available, the type of runway surface and the length of the longest runway or channel, shown in abbreviated form for each aerodrome in conformity with the example given in Appendix 2, provided they do not cause undesirable clutter on the chart, shall be indicated.

16.9.2.3 Abandoned aerodromes which are still recognizable as aerodromes from the air shall be shown and identified as abandoned.

### 16.9.3 Obstacles

#### 16.9.3.1 Obstacles shall be shown.

*Note.— Objects of a height of 100 m (300 ft) or more above ground are normally regarded as obstacles.*

16.9.3.2 When considered of importance to visual flight, prominent transmission lines and permanent cable car installations, which are obstacles, shall be shown.

#### 16.9.4 Prohibited, restricted and danger areas Prohibited, restricted and danger areas shall be shown.

### 16.9.5 Air traffic services system

16.9.5.1 Significant elements of the air traffic services system including, where practicable, control zones, aerodrome traffic zones, control areas, flight information regions and other airspaces in which VFR flights operate shall be shown together with the appropriate class of airspace.

16.9.5.2 Where appropriate, the air defence identification zone (ADIZ) shall be shown and properly identified.

*Note.— ADIZ procedures may be described in the chart legend.*

### 16.9.6 Radio navigation aids

Radio navigation aids shall be shown by the appropriate symbol and named, but excluding their frequencies, coded designators, times of operation and other characteristics unless any or all of this information which is shown is kept up to date by means of new editions of the chart.

### 16.9.7 Supplementary information

16.9.7.1 Aeronautical ground lights together with their characteristics or their identifications or both shall be shown.

16.9.7.2 Marine lights on outer prominent coastal or isolated features of not less than 28 km (15 NM) visibility range shall be shown:

- 1) where they are not less distinguishable than more powerful marine lights in the vicinity;
- 2) where they are readily distinguishable from other marine or other types of lights in the vicinity of built-up coastal areas;
- 5) where they are the only lights of significance available.



## **CHAPTER 17. AERONAUTICAL CHART — ICAO 1:500 000**

### **17.1 Function**

This chart shall provide information to satisfy the requirements of visual air navigation for low speed, short- or medium-range operations at low and intermediate altitudes.

*Note 1.— This chart may be used:*

- a) to serve as a basic aeronautical chart;*
- b) to provide a suitable medium for basic pilot and navigation training;*
- c) to supplement highly specialized charts which do not provide essential visual information;*
- d) in pre-flight planning.*

*Note 2.— It is intended that these charts be provided for land areas where charts of this scale are required for civil air operations employing visual air navigation independently or in support of other forms of air navigation.*

*Note 3.— Where States produce charts of this series covering their national territories, the entire area being portrayed is usually treated on a regional basis.*

### **17.2 Availability**

It is recommended that the Aeronautical Chart - ICAO 1:500 000 should be made available in the manner prescribed in 1.3.2 for all areas delineated in Appendix 5.

*Note.— The selection of this scale as an alternative to the World Aeronautical Chart - ICAO 1:1 000 000 is covered by 16.2.1 and 16.2.2.*

### **17.3 Scales**

17.3.1 Linear scales for kilometres and nautical miles arranged in the following order:

- kilometres,
- nautical miles,

with their zero points in the same vertical line shall be shown in the margin.

17.3.1.1 It is recommended that the length of the linear scale should be not less than 200 mm (8 in).

17.3.2 A conversion scale (metres / feet) shall be shown in the margin.

### **17.4 Format**

17.4.1 The title and marginal notes shall be in English language.

17.4.2 The information regarding the number of the adjoining sheets and the unit of measurement used to express elevation shall be so located as to be clearly visible when the sheet is folded.

---

17.4.3 It is recommended that the method of folding should be as follows: Fold the chart on the long axis near the mid-parallel of latitude, face out, with the bottom part of the chart face upward. Fold inwards near the meridian and fold both halves backward in accordion folds.

17.4.4 It is recommended that whenever practicable, sheets should be quarter sheets of the World Aeronautical Chart - ICAO 1:1 000 000. An appropriate index to adjacent sheets, showing the relationship between the two chart series should be included on the face of the chart or on the reverse side.

*Note.— Sheet lines may be varied to satisfy particular requirements.*

17.4.5 It is recommended that overlaps should be provided by extending the chart area on the top and right side beyond the area given on the index. This overlap area should contain all aeronautical, topographical, hydrographical and cultural information. The overlap should extend up to 15 km (8 NM), if possible, but in any case from the limiting parallels and meridians of each chart to the neat line.

## **17.5 Projection**

17.5.1 A conformal (orthomorphic) projection shall be used.

17.5.2 It is recommended that the projection of the World Aeronautical Chart - ICAO 1:1 000 000 should be used.

17.5.3 Parallels shall be shown at intervals of 30'.

17.5.3.1 Meridians shall normally be shown at intervals of 30'.

*Note - At high latitudes this interval may be increased.*

17.5.4 Graduation marks shall be shown at 1' intervals along each whole degree meridian and parallel, extending away from the Greenwich Meridian and from the Equator. Each 10' interval shall be shown by a mark on both sides of the graticule line.

17.5.4.1 It is recommended that the length of the graduation marks should be approximately 1.3 mm (0.05 in) for the 1' intervals, and 2 mm (0.08 in) for the 5' intervals and 2 mm (0.08 in) extending on both sides of the graticule line for the 10' intervals.

17.5.5 All meridians and parallels shown shall be numbered in the borders of the chart.

17.5.5.1 It is recommended that each meridian and parallel should be numbered within the body of the chart whenever this data is required operationally.

17.5.6 The name and basic parameters of the projection shall be indicated in the margin.

## 17.6 Identification

17.6.1 Each sheet shall be identified by a name which should be that of the principal town or of a main geographical feature appearing on the sheet.

17.6.1.1 It is recommended that where applicable, sheets should also be identified by the reference number of the corresponding World Aeronautical Chart - ICAO 1:1 000 000, with the addition of one or more of the following letter suffixes indicating the quadrant or quadrants:

Letter	Chart quadrant
<i>A</i>	<i>North-West</i>
<i>B</i>	<i>North-East</i>
<i>C</i>	<i>South-East</i>
<i>D</i>	<i>South-West</i>

## 17.7 Culture and topography

### 17.7.1 Built-up areas

17.7.1.1 Cities, towns and villages shall be selected and shown according to their relative importance to visual air navigation.

17.7.1.2 It is recommended that cities and towns of sufficient size should be shown by the outline of their built-up areas and not of their established city limits.

### 17.7.2 Railroads

17.7.2.1 All railroads having landmark value shall be shown.

*Note 1.— In congested areas, some railroads may be omitted in the interest of legibility.*

*Note 2.— Railroads may be named.*

*Note 3.— Rail stations may be shown.*

17.7.2.2 Tunnels shall be shown when they serve as prominent landmarks.

*Note.— A descriptive note may be added, if necessary, to accentuate this feature.*

### 17.7.3 Highways and roads

17.7.3.1 Road systems shall be shown in sufficient detail to indicate significant patterns from the air.

*Note.— Roads under construction may be shown.*

17.7.3.2 It is recommended that roads should not be shown in built-up areas unless they can be distinguished from the air as definite landmarks.

*Note.— The numbers or names of important highways may be shown.*

#### 17.7.4 Landmarks

It is recommended that natural and cultural landmarks, such as bridges, mine structures, lookout towers, forts, ruins, levees, pipelines, prominent transmission lines, permanent cable car installations, and rocks, bluffs, cliffs, sand dunes, isolated lighthouses, lightships, etc., when considered to be of importance for visual air navigation, should be shown.

*Note.— Descriptive notes may be added.*

#### 17.7.5 Political boundaries

International boundaries shall be shown. Undemarcated or undefined boundaries shall be distinguished by descriptive notes.

*Note.— Other boundaries may be shown.*

#### 17.7.6 Hydrography

17.7.6.1 All water features compatible with the scale of the chart comprising shore lines, lakes, rivers and streams (including those non-perennial in nature), salt lakes, glaciers and ice caps shall be shown.

17.7.6.2 It is recommended that the tint covering large open water areas should be kept very light.

*Note.— A narrow band of darker tone may be used along the shore line to emphasize this feature.*

17.7.6.3 It is recommended that reefs and shoals, including rocky ledges, tidal flats, isolated rocks, sand, gravel, stone and all similar areas should be shown by symbols when of significant landmark value.

*Note.— Groups of rocks may be shown by a few representative rock symbols within the area.*

#### 17.7.7 Contours

17.7.7.1 Contours shall be shown. The selection of intervals shall be governed by the requirement to depict clearly the relief features required in air navigation.

17.7.7.2 The values of the contours used shall be shown.

#### 17.7.8 Hypsometric tints

17.7.8.1 When hypsometric tints are used, the range of elevations for the tints shall be shown.

17.7.8.2 The scale of the hypsometric tints used on the chart shall be shown in the margin.

#### 17.7.9 Spot elevations

17.7.9.1 Spot elevations shall be shown at selected critical points. The elevation selected shall always be the highest in the immediate vicinity and shall generally indicate the top of a peak, ridge, etc. Elevations in valleys and at lake surface levels which are of navigational value shall be shown. The position of each selected elevation shall be indicated by a dot.

17.7.9.2 The elevation (in metres or feet) of the highest point on the chart and its geographical position to the nearest five minutes shall be indicated in the margin.

17.7.9.3 It is recommended that the spot elevation of the highest point on any sheet should be cleared of hypsometric tinting.

#### 17.7.10 Incomplete or unreliable relief

17.7.10.1 Areas that have not been surveyed for contour information shall be labelled “Relief data incomplete”.

17.7.10.2 Charts on which spot elevations are generally unreliable shall bear a warning note prominently displayed on the face of the chart in the colour used for aeronautical information, as follows:

“Warning - The reliability of relief information on this chart is doubtful and elevations should be used with caution.”

#### 17.7.11 Escarpments

It is recommended that escarpments should be shown when they are prominent landmarks or when cultural detail is very sparse.

#### 17.7.12 Wooded areas

17.7.12.1 It is recommended that wooded areas should be shown.

*Note.— On high latitude charts the approximate extreme northern or southern limits of tree growth may be shown.*

17.7.12.2 Where shown, the approximate northern or southern limits of tree growth shall be indicated by a dashed black line and shall be appropriately labelled.

#### 17.7.13 Date of topographic information

The date of latest information shown on the topographic base shall be indicated in the margin.

## **17.8 Magnetic variation**

17.8.1 Isogonic lines shall be shown.

17.8.2 The date of the isogonic information shall be indicated in the margin.

## **17.9 Aeronautical data**

17.9.1 Aeronautical information shall be shown consistent with the use of the chart and the revision cycle.

### **17.9.2 Aerodromes**

17.9.2.1 Land and water aerodromes and heliports shall be shown with their names, to the extent that they do not produce undesirable congestion on the chart, priority being given to those of greatest aeronautical significance.

17.9.2.2 The aerodrome elevation, the lighting available, the type of runway surface and the length of the longest runway or channel, shown in abbreviated form for each aerodrome in conformity with the example given in Appendix 2, provided they do not cause undesirable clutter on the chart, shall be indicated.

17.9.2.3 Abandoned aerodromes which are still recognizable as aerodromes from the air shall be shown and identified as abandoned.

### **17.9.3 Obstacles**

17.9.3.1 Obstacles shall be shown.

*Note.— Objects of a height of 100 m (300 ft) or more above ground are normally regarded as obstacles.*

17.9.3.2 When considered of importance to visual flight, prominent transmission lines and permanent cable car installations, which are obstacles, shall be shown.

17.9.4 Prohibited, restricted and danger areas Prohibited, restricted and danger areas shall be shown.

### **17.9.5 Air traffic services system**

17.9.5.1 Significant elements of the air traffic services system including, where practicable, control zones, aerodrome traffic zones, control areas, flight information regions and other airspaces in which VFR flights operate shall be shown together with the appropriate class of airspace.

17.9.5.2 Where appropriate, the air defence identification zone (ADIZ) shall be shown and properly identified.

*Note.— ADIZ procedures may be described in the chart legend.*

### **17.9.6 Radio navigation aids**

Radio navigation aids shall be shown by the appropriate symbol and named, but excluding their frequencies, coded designators, times of operation and other characteristics unless any or all of this information which is shown is kept up to date by means of new editions of the chart.

17.9.7 Supplementary information

17.9.7.1 Aeronautical ground lights together with their characteristics or their identifications or both shall be shown.

17.9.7.2 Marine lights on outer prominent coastal or isolated features of not less than 28 km (15 NM) visibility range shall be shown:

- 1) where they are not less distinguishable than more powerful marine lights in the vicinity;
- 2) where they are readily distinguishable from other marine or other types of lights in the vicinity of built-up coastal areas;
- 3) where they are the only lights of significance available.

## **CHAPTER 18. AERONAUTICAL NAVIGATION CHART - ICAO SMALL SCALE**

### **18.1 Function**

This chart shall:

- 1) serve as an air navigation aid for flight crews of long range aircraft at high altitudes;
- 2) provide selective checkpoints over extensive ranges for identification at high altitudes and speeds, which are required for visual confirmation of position;
- 3) provide for continuous visual reference to the ground during long range flights over areas lacking radio or other electronic navigation aids, or over areas where visual navigation is preferred or becomes necessary;
- 4) provide a general purpose chart series for long range flight planning and plotting.

### **18.2 Availability**

It is recommended that the Aeronautical Navigation Chart - ICAO Small Scale should be made available in the manner prescribed in 1.3.2 for all areas delineated in Appendix 5.

*Note.— The selection of this scale as an alternative to the World Aeronautical Chart — ICAO 1:1 000 000 is covered by 16.2.1 and 16.2.2.*

### **18.3 Coverage and scale**

18.3.1 It is recommended that the Aeronautical Navigation Chart - ICAO Small Scale should provide, as a minimum, complete coverage of the major land masses of the world.

*Note 1.— A sheet layout for this series is contained in the Aeronautical Chart Manual (Doc 8697).*

*Note 2.— The sheet size may represent the maximum press size available to the producing agency.*

18.3.2 The scale shall be in the range of 1:2 000 000 to 1:5 000 000.

18.3.3 The scale of the chart shall be substituted in the title for the words “Small Scale”.

18.3.4 Linear scales for kilometres and nautical miles arranged in the following order:

- kilometres,
- nautical miles,

with their zero points in the same vertical line shall be shown in the margin.

18.3.5 It is recommended that the length of the linear scale should be not less than 200 mm (8 in).



18.3.6 A conversion scale (metres/feet) shall be shown in the margin.

#### **18.4 Format**

18.4.1 The title and marginal notes shall be in one of the working languages of ICAO.

*Note - The language of the publishing country or any other language may be used in addition to the ICAO working language.*

18.4.2 The information regarding the number of the adjoining sheets and the unit of measurement to express elevations shall be so located as to be clearly visible when the sheet is folded.

*Note.— There is no internationally agreed sheet numbering.*

#### **18.5 Projection**

18.5.1 A conformal (orthomorphic) projection shall be used.

18.5.1.1 The name and basic parameters of the projection shall be shown in the margin.

18.5.2 Parallels shall be shown at intervals of 1°.

18.5.2.1 Graduations on the parallels shall be shown at sufficiently close intervals compatible with the latitude and the scale of the chart.

18.5.3 Meridians shall be shown at intervals compatible with the latitude and the scale of the chart.

18.5.3.1 Graduations on the meridians shall be shown at intervals not exceeding 5'.

18.5.4 The graduation marks shall extend away from the Greenwich Meridian and from the Equator.

18.5.5 All meridians and parallels shown shall be numbered in the borders of the chart. In addition, when required, meridians and parallels shall be numbered within the body of the chart in such a manner that they can be readily identified when the chart is folded.

#### **18.6 Culture and topography**

18.6.1 Built-up areas

18.6.1.1 Cities, towns and villages shall be selected and shown according to their relative importance to visual air navigation.

---

18.6.1.2 It is recommended that cities and towns of sufficient size should be indicated by the outline of their built-up areas and not of their established city limits.

#### 18.6.2 Railroads

18.6.2.1 All railroads having landmark value shall be shown.

*Note.— In congested areas, some railroads may be omitted in the interest of legibility.*

18.6.2.2 It is recommended that important tunnels should be shown.

*Note.— A descriptive note may be added.*

#### 18.6.3 Highways and roads

18.6.3.1 Road systems shall be shown in sufficient detail to indicate significant patterns from the air.

18.6.3.2 It is recommended that roads should not be shown in built-up areas unless they can be distinguished from the air as definite landmarks.

#### 18.6.4 Landmarks

It is recommended that natural and cultural landmarks, such as bridges, prominent transmission lines, permanent cable car installations, mine structures, forts, ruins, levees, pipelines and rocks, bluffs, cliffs, sand dunes, isolated lighthouses, lightships, etc., when considered to be of importance for visual air navigation, should be shown.

*Note.— Descriptive notes may be added.*

#### 18.6.5 Political boundaries

International boundaries shall be shown. Undemarcated and undefined boundaries shall be distinguished by descriptive notes.

#### 18.6.6 Hydrography

18.6.6.1 All water features compatible with the scale of the chart comprising shore lines, lakes, rivers and streams (including those non-perennial in nature), salt lakes, glaciers and ice caps shall be shown.

18.6.6.2 It is recommended that the tint covering large open water areas should be kept very light.

*Note.— A narrow band of darker tone may be used along the shore line to emphasize this feature.*

18.6.6.3 It is recommended that reefs and shoals including rocky ledges, tidal flats, isolated rocks, sand, gravel, stone and all similar areas should be shown by a symbol when of significant landmark value.

#### 18.6.7 Contours

---

18.6.7.1 Contours shall be shown. The selection of intervals shall be governed by the requirement to depict clearly the relief features required in air navigation.

18.6.7.2 The values of the contours used shall be shown.

18.6.8 Hypsometric tints

18.6.8.1 When hypsometric tints are used the range of elevations for the tints shall be shown.

18.6.8.2 The scale of the hypsometric tints used on the chart shall be shown in the margin.

18.6.9 Spot elevations

18.6.9.1 Spot elevations shall be shown at selected critical points. The elevations selected shall always be the highest in the immediate vicinity, and shall generally indicate the top of a peak, ridge, etc. Elevations in valleys and at lake surface levels which are of value to visual air navigation shall be shown. The position of each selected elevation shall be indicated by a dot.

18.6.9.2 The elevation (in metres or feet) of the highest point on the chart and its geographical position to the nearest five minutes shall be indicated in the margin.

18.6.9.3 It is recommended that the spot elevation of the highest point in any sheet should be cleared of hypsometric tinting.

18.6.10 Incomplete or unreliable relief

18.6.10.1 Areas that have not been surveyed for contour information shall be labelled “Relief data incomplete”.

18.6.10.2 Charts on which spot elevations are generally unreliable shall bear a warning note prominently displayed on the face of the chart in the colour used for aeronautical information, as follows: “Warning - The reliability of relief information on this chart is doubtful and elevations should be used with caution.”

18.6.11 Escarpments

It is recommended that escarpments should be shown when they are prominent landmarks or when cultural detail is very sparse.

18.6.12 Wooded areas

It is recommended that wooded areas of large extent should be shown.

18.6.13 Date of topographic information

The date of latest information shown on the topographic base shall be indicated in the margin.

18.6.14 Colours

---

18.6.14.1 It is recommended that subdued colours should be used for the chart background to facilitate plotting.

18.6.14.2 It is recommended that good colour contrast should be ensured to emphasize features important to visual air navigation.

### **18.7 Magnetic variation**

18.7.1 Isogonic lines shall be shown.

18.7.2 The date of isogonic information shall be indicated in the margin.

### **18.8 Aeronautical data**

#### 18.8.1 Aerodromes

Land and water aerodromes and heliports shall be shown with their names, to the extent that they do not produce undesirable congestion on the chart, priority being given to those of greatest aeronautical significance.

#### 18.8.2 Obstacles

Obstacles shall be shown.

#### 18.8.3 Prohibited, restricted and danger areas

It is recommended that prohibited, restricted and danger areas should be shown when considered to be of importance to air navigation.

#### 18.8.4 Air traffic services system

18.8.4.1 It is recommended that significant elements of the air traffic services system should be shown when considered to be of importance to air navigation.

18.8.4.2 It is recommended that where appropriate, the air defence identification zone (ADIZ) should be shown and properly identified.

*Note.— ADIZ procedures may be described in the chart legend.*

#### 18.8.5 Radio navigation aids

*Note.— Radio aids to navigation may be shown by the appropriate symbol and named.*

## CHAPTER 19. PLOTTING CHART — ICAO

### 19.1 Function

This chart shall provide a means of maintaining a continuous flight record of the aircraft position by various fixing methods and dead reckoning in order to maintain an intended flight path.

### 19.2 Availability

It is recommended that this chart should be made available, in the manner prescribed in 1.3.2, to cover major air routes over oceanic areas and sparsely settled areas used by international civil aviation.

*Note.— In areas where the Enroute Chart — ICAO is provided there may be no requirement for a plotting chart.*

### 19.3 Coverage and scale

19.3.1 It is recommended that where practicable, the chart for a particular region should cover major air routes and their terminals on a single sheet.

19.3.2 It is recommended that *the* scale should be governed by the area to be covered.

*Note.— Normally the scale will range from 1:3 000 000 to 1:7 500 000.*

### 19.4 Format

It is recommended that the sheet should be of a size that can be adapted for use on a navigator's plotting table.

### 19.5 Projection

19.5.1 It is recommended that a conformal projection on which a straight line approximates a great circle should be used.

19.5.2 Parallels and meridians shall be shown.

19.5.2.1 It is recommended that the intervals should be arranged to permit accurate plotting to be carried out with a minimum of time and effort.

19.5.2.2 Graduation marks shall be shown at consistent intervals along an appropriate number of parallels and meridians. The interval selected shall, regardless of scale, minimize the amount of interpolation required for accurate plotting.

19.5.2.3 It is recommended that the parallels and meridians should be numbered so that a number appears at least once every 15 cm (6 in) on the face of the chart.

19.5.2.4 If a navigational grid is shown on charts covering the higher latitudes, it shall comprise lines parallel to the Meridian or anti-Meridian of Greenwich.

## 19.6 Identification

Each sheet shall be identified by chart series and number.

## 19.7 Culture and topography

19.7.1 Generalized shore lines of all open water areas, large lakes and rivers shall be shown.

19.7.2 Spot elevations for selected features constituting a hazard to air navigation shall be shown.

19.7.3 It is recommended that particularly hazardous or prominent relief features should be emphasized.

*Note.— Large cities and towns may be shown.*

## 19.8 Magnetic variation

19.8.1 Isogonals or, in higher latitudes, isogrivs, or both, shall be shown at consistent intervals throughout the chart. The interval selected shall, regardless of scale, minimize the amount of interpolation required.

19.8.2 The date of the isogonic information shall be shown.

## 19.9 Aeronautical data

19.9.1 The following aeronautical data shall be shown:

- 1) aerodromes regularly used by international commercial air transport together with their names;
- 2) selected radio aids to navigation that will contribute to position-finding together with their names and identifications;
- 3) lattices of long-range electronic aids to navigation, as required;
- 4) boundaries of flight information regions, control areas and control zones necessary to the function of the chart;
- 5) designated reporting points necessary to the function of the chart;
- 6) ocean station vessels.

*Note - Other aeronautical data may be shown provided that they do not detract from the legibility of essential information.*

19.9.2 It is recommended that aeronautical ground lights and marine lights useful for air navigation should be shown where other means of navigation are non-existent.



## **CHAPTER 20. ELECTRONIC AERONAUTICAL CHART DISPLAY - ICAO**

### **20.1 Function**

The Electronic Aeronautical Chart Display - ICAO, with adequate back-up arrangements and in compliance with the requirements of Annex 6 for charts, shall enable flight crews to execute, in a convenient and timely manner, route planning, route monitoring and navigation by displaying required information.

### **20.2 Information available for display**

20.2.1 The Electronic Aeronautical Chart Display - ICAO shall be capable of displaying all aeronautical, cultural and topographic information required by this MCAR, Chapter 5 and Chapters 7 through 19.

20.2.2 It is recommended that the Electronic Aeronautical Chart Display - ICAO should be capable of displaying all aeronautical, cultural and topographic information recommended by this MCAR, Chapter 5 and Chapters 7 through 19.

*Note.— The Electronic Aeronautical Chart Display - ICAO may display supplementary information, in addition to that required for the equivalent paper chart, which may be considered useful for safe navigation.*

### **20.3 Display requirements**

#### 20.3.1 Display categories

20.3.1.1 Information available for display shall be subdivided into the following categories:

- a) basic display information, permanently retained on the display and consisting of the minimum information essential for the safe conduct of flight; and
- b) other display information, which may be removed from the display or displayed individually on demand, and consisting of information not considered essential for the safe conduct of flight.

20.3.1.2 It shall be a simple function to add or remove other display information but shall not be possible to remove information contained in the basic display.

#### 20.3.2 Display mode and generation of neighbouring area

20.3.2.1 The Electronic Aeronautical Chart Display - ICAO shall be capable of continuously plotting the aircraft's position in a true motion mode where reset and generation of the surrounding area shall take place automatically.

*Note.— Other modes, such as static chart displays, may be available.*

20.3.2.2 It shall be possible manually to change the chart area and the position of the aircraft relative to the edge of the display.



### 20.3.3 Scale

It shall be possible to vary the scale at which a chart is displayed.

### 20.3.4 Symbols

Symbols used shall conform to those specified for electronic charts in Appendix 2 - ICAO Chart Symbols except where it is desired to show items for which no ICAO chart symbol is provided. In these cases electronic chart symbols shall be chosen which:

- a) employ a minimum use of lines, arcs and area fills;
- b) do not cause confusion with any existing aeronautical chart symbol;
- c) do not impair the legibility of the display.

*Note.— Additional details for each symbol may be added according to the resolution of the output media, but any enhancements may not change the basic recognizability of the symbol.*

### 20.3.5 Display hardware

20.3.5.1 The effective size of the chart presentation shall be sufficient to display the information required by 20.2 without excessive scrolling.

20.3.5.2 The display shall have the capabilities required to accurately portray required elements of Appendix 2 - ICAO Chart Symbols.

20.3.5.3 The method of presentation shall ensure that the displayed information is clearly visible to the observer in the conditions of natural and artificial light experienced in the cockpit.

20.3.5.4 The display luminance shall be adjustable by the flight crew.

## **20.4 Provision and updating of data**

20.4.1 The provision and updating of data for use by the display shall be in conformance with the aeronautical data quality system requirements.

*Note.— For aeronautical data quality system requirements see Chapter 2, 2.17 and Annex 15, Chapter 3, 3.2.*

20.4.2 The display shall be capable of automatically accepting authorized updates to existing data. A means of ensuring that authorized data and all relevant updates to that data have been correctly loaded into the display shall be provided.

20.4.3 The display shall be capable of accepting updates to authorized data entered manually with simple means for verification prior to final acceptance of the data. Updates entered manually shall be distinguishable on the display from authorized data and its authorized updates and shall not affect display legibility.

20.4.4 A record shall be kept of all updates, including date and time of application.

20.4.5 The display shall allow the flight crew to display updates so that the flight crew may review the contents of the updates and determine that they have been included in the system.

## **20.5 Performance tests, malfunction alarms and indications**

20.5.1 A means shall be provided for carrying out onboard tests of major functions. In case of a failure, the test shall display information to indicate which part of the system is at fault.

20.5.2 A suitable alarm or indication of system malfunction shall be provided.

## **20.6 Back-up arrangements**

To ensure safe navigation in case of a failure of the Electronic Aeronautical Chart Display - ICAO, the provision of adequate back-up arrangements shall include:

- a) facilities enabling a safe takeover of display functions in order to ensure that a failure does not result in a critical situation; and
- b) a back-up arrangement facilitating the means for safe navigation of the remaining part of the flight.

*Note.— A suitable back-up system may include the carriage of paper charts.*

## **CHAPTER 21. RADAR MINIMUM ALTITUDE CHART - ICAO**

### **21.1 Function**

21.1.1 This supplementary chart shall provide information that will enable flight crews to monitor and cross-check altitudes assigned by a controller using an ATS surveillance system.

*Note – The objectives of the air traffic control service as prescribed in Annex 11 do not include prevention of collision with terrain. The procedures prescribed in the Procedures for Air Navigation Services – Air Traffic Management (PANSATM, Doc 4444) do not relieve pilots of their responsibility to ensure that any clearances issued by air traffic control units are safe in this respect. When an IFR flight is vectored or is given a direct routing which takes the aircraft off an ATS route, the PANS-ATM, Chapter 8, 8.6.5.2 applies.*

21.1.2 A note indicating that the chart may only be used for cross-checking of altitudes assigned while the aircraft is identified shall be prominently displayed on the face of the chart.

### **21.2 Availability**

It is recommended that the ATC Surveillance Minimum Altitude Chart – ICAO should be made available, in the manner prescribed in 1.3.2, where vectoring procedures are established and minimum vectoring altitudes cannot be shown adequately on the Area Chart – ICAO, Standard Departure Chart – Instrument (SID) – ICAO or Standard Arrival Chart – Instrument (STAR) – ICAO.

### **21.3 Coverage and scale**

21.3.1 The coverage of the chart shall be sufficient to effectively show the information associated with radar vectoring procedures.

21.3.2 The chart shall be drawn to scale.

21.3.3 It is recommended that the chart should be drawn to the same scale as the associated Area Chart - ICAO.

### **21.4 Projection**

21.4.1 It is recommended that a conformal projection on which a straight line approximates a geodesic line should be used.

21.4.2 It is recommended that the graduation marks should be placed at consistent intervals along the neat lines, as appropriate.

### **21.5 Identification**

The chart shall be identified by the name of the aerodrome for which the radar vectoring procedures are established or, when procedures apply to more than one aerodrome, the name associated with the airspace portrayed.

---

*Note - The name may be that of the city which the aerodrome serves or, when the procedures apply to more than one aerodrome, that of the air traffic services centre or the largest city or town situated in the area covered by the chart.*

## **21.6 Culture and topography**

21.6.1 Generalized shorelines of all open water areas, large lakes and rivers shall be shown except where they conflict with data more applicable to the function of the chart.

21.6.2 Appropriate spot elevations and obstacles shall be shown.

*Note.— Appropriate spot elevations and obstacles are those provided by the procedures specialist.*

## **21.7 Magnetic variation**

The average magnetic variation of the area covered by the chart shall be shown to the nearest degree.

## **21.8 Bearings, tracks and radials**

21.8.1 Bearings, tracks and radials shall be magnetic, except as provided for in 21.8.2.

21.8.2 It is recommended that in areas of high latitude, where it is determined by the Director General of Civil Aviation that reference to Magnetic North is impractical, another suitable reference, i.e. True North or Grid North, should be used.

21.8.3 Where bearings, tracks or radials are given with reference to True North or Grid North, this shall be clearly indicated. When Grid North is used its reference grid meridian shall be identified.

## **21.9 Aeronautical data**

21.9.1 Aerodromes

21.9.1.1 All aerodromes that affect the terminal routings shall be shown. Where appropriate a runway pattern symbol shall be used.

21.9.1.2 The elevation of the primary aerodrome to the nearest metre or foot shall be shown.

21.9.2 Prohibited, restricted and danger areas shall be depicted with their identification.

21.9.3 Air traffic services system

21.9.3.1 The chart shall show components of the established air traffic services system including:

- 1) relevant radio navigation aids together with their identifications;
- 2) lateral limits of relevant designated airspace;
- 3) relevant significant points associated with standard instrument departure and arrival procedures;

*Note – Routes used in the vectoring of aircraft to and from the significant points may be shown.*

- 4) transition altitude, where established;
- 5) information associated with vectoring including:

- a) minimum vectoring altitudes to the nearest higher 50 m or 100 ft, clearly identified;
- b) lateral limits of minimum vectoring altitude sectors normally defined by bearings and radials to/from radio navigation aids to the nearest degree or, if not practicable, geographical coordinates in degrees, minutes and seconds and shown by heavy lines so as to clearly differentiate between established sectors;

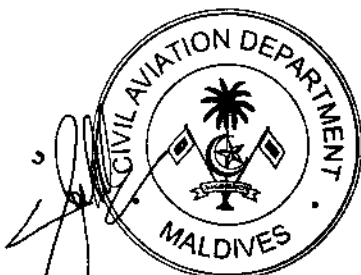
*Note – In congested areas geographical coordinates may be omitted in the interest of legibility.*

- c) distance circles at 20-km or 10-NM intervals or, when practicable, 10-km or 5-NM intervals shown as fine dashed lines with the radius indicated on the circumference and centred on the identified aerodrome main VOR radio navigation aid or, if not available, on the aerodrome/heliport reference point;

- d) notes concerning correction for low temperature effect, as applicable;


- 6) communications procedures including call sign(s) and channel(s) of the ATC unit(s) concerned.

21.9.3.2 It is recommended that a textual description of communication failure procedures in relation to radar control should be provided and should, whenever feasible, be shown on the chart or on the same page that contains the chart.



**For the Civil Aviation Department**  
Hussain Jaleel  
DEPUTY DIRECTOR GENERAL

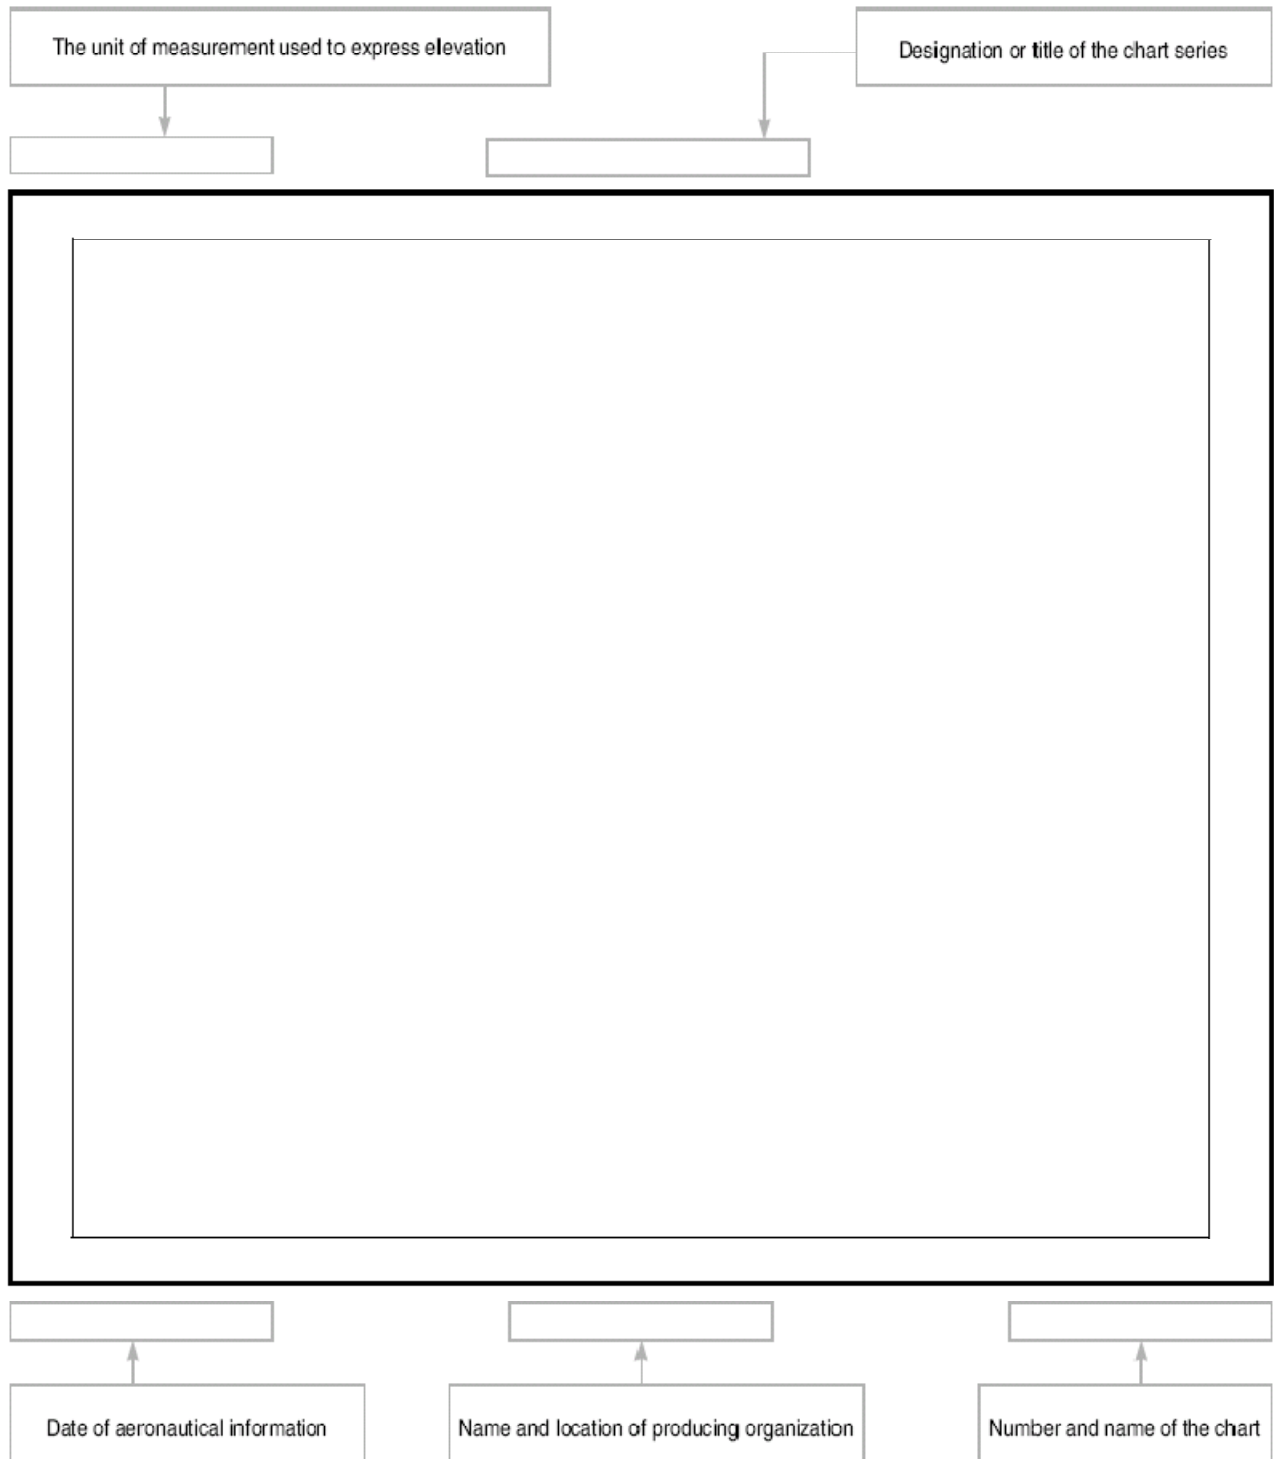APPENDIX 1 – MARGINAL NOTE LAYOUT



**APPENDIX 2. ICAO CHART SYMBOLS**

<i>Index</i>	<i>No.</i>
Abandoned canal	30
Advisory airspace — ADA	115
Advisory route — ADR	118
Aerodrome/Heliport Charts	144-158
Aerodrome Obstacle Charts	159-167
Building or large structure	161
Clearway — CWY	167
Escarpment	165
Pole, tower, spire, antenna	160
Railroad	162
Stopway — SWY	166
Terrain penetrating obstacle plane	164
Transmission line or overhead cable	163
Tree or shrub	159
Aerodrome reference point — ARP (on Aerodrome/Heliport Charts)	149
Aerodromes	84-98
Abandoned or closed	91
Civil, land	84
Civil, water	85
Data in abbreviated form	96
Emergency, or with no facilities	90
For Approach Charts	97,98
For use on charts on which aerodrome classification is not required	93
Joint civil and military, land	88
Joint civil and military, water	89
Military, land	86
Military, water	87
Runway pattern in lieu of aerodrome symbol	95
Runway	172
Aerodrome traffic zone — ATZ	112
Aeronautical ground light	142
Air defence identification zone — ADIZ	117
Airspace Classifications	127,128
Airspace Restrictions	129,130
Air Traffic Services — ATS	111-126
Airway — AWY	113
Altitudes/flight levels	126
Antenna (on Aerodrome Obstacle Charts)	160
Approximate contours	2
Areas not surveyed for contour information	18
ATS/MET reporting point — MRP (compulsory, on request)	123
Basic radio navigation aid	99
Bluff 4	

*Index* *No.*

---

Boundaries (international)	63
Boundaries, other	64
Building (on Aerodrome Obstacle Charts)	161
Buildings	50
Built-up areas	47-50
Canal	29
Change-over point — COP	122
Charted isolated rock	44
Church	80
City or large town	47
Clearway — CWY (on Aerodrome Obstacle Charts)	167
Cliff	4
Coast guard station	73
Collocated VOR and DME radio navigation aids — VOR/DME	103,110
Collocated VOR and TACAN radio navigation aids — VORTAC	107,110
Compass rose	110
Contours	1
Control area — CTA	113
Controlled route	113
Control zone — CTR	116
Coral reefs and ledges	22
Culture	47-83
Culture, miscellaneous	63-83
Dam	67
Danger area	129
Danger line	43
Distance measuring equipment — DME	102,110,176,177
DME distance	104
Dry lake bed	39
Dual highway	57
Electronic Chart Symbols	100,101,103,107,108,142, 168, 177
Escarpment	4
Escarpment (on Aerodrome Obstacle Charts)	165
Esker	9
Falls	28
Fence	65
Ferry	68
Final approach fix — FAF	125
Flight information region — FIR	111
Flight levels	126
Forest ranger station	76
Fort	79
Gas field	70
Glaciers	42
<i>Index</i>	<i>No.</i>
Gravel	8
Hard surface runway (on Aerodrome/Heliport Charts)	144
Helicopter alighting area on an aerodrome (on Aerodrome/Heliport Charts)	148
Heliport	94
Highest elevation on chart	12

---



---

Highways	57-62
Holding pattern	170
Hydrography	19-46
Ice cap	42
Instrument landing system — ILS	108
International boundary closed to passage of aircraft except through air corridor	130
Isogonic line or isogonal	139
Lakes (non-perennial)	32
Lakes (perennial)	31
Landing direction indicator (lighted) (on Aerodrome/Heliport Charts)	155
Landing direction indicator (unlighted) (on Aerodrome/Heliport Charts)	156
Large river (perennial)	23
Large structure (on Aerodrome Obstacle Charts)	161
Large town	47
Lava flow	5
Levee	9
Lightship	143
Lookout tower	74
Marine light	141
Mine	75
Minimum sector altitude — MSA	168
Miscellaneous symbols — aeronautical	138-140
Miscellaneous symbols — culture	63-83
Missed approach track	171
Mosque	81
Mountain pass	11
Non-directional radio beacon — NDB	100
Nuclear power station	72
Obstacle light (on Aerodrome/Heliport Charts)	154
Obstacles	131-137
Elevation of top	137
Exceptionally high	135
Exceptionally high, lighted	136
Group	133
Height	137
Lighted	132
Lighted group	134
Obstacle	131
Ocean station vessel	140
Oil field	70
<i>Index</i>	<i>No.</i>
Other boundaries	64
Other trees	16
Overhead cable (on Aerodrome Obstacle Charts)	163
Pagoda	82
Palms	17
Parking areas (on Aerodrome/Heliport Charts)	147
Pierced steel plank or steel mesh runway (on Aerodrome/Heliport Charts)	152

---

---

Pipeline	69
Point light (on Aerodrome/Heliport Charts)	153
Pole (on Aerodrome Obstacle Charts)	160
Primary road	58
Prohibited area	129
Prominent transmission line	138
Race track	77
Radio marker beacon	109,174,175,177
Radio navigation aid — basic	99,173
Radio navigation aids	99-110,173-176
Railroads	51-56
Bridge	54
Railroad (on Aerodrome Obstacle Charts)	162
Single track	51
Station	56
Tunnel	55
Two or more tracks	52
Under construction	53
Rapids	27
Relief data incomplete	18
Relief shown by hachures	3
Reporting point — REP (compulsory, on request)	121
Reservoir	38
Restricted airspace (prohibited, restricted or danger area) and common boundary of two areas	129
Restricted area	129
Rice field	36
Rivers and streams (non-perennial)	25
Rivers and streams (unsurveyed)	26
Road bridge	61
Road tunnel	62
Rock awash	45
Ruins	78
Runway	172
Runway-holding position (on Aerodrome/Heliport Charts)	158
Runway visual range (RVR) observation site (on Aerodrome/Heliport Charts)	151
Salt lake	33
Salt pans (evaporator)	34
Sand area	7
Sand dunes	6
<i>Index</i>	<i>No.</i>
Scale-break (on ATS route)	120
Secondary road	59
Sheltered anchorage	92
Shoals	41
Shore line (reliable)	19
Shore line (unreliable)	20
Shrub (on Aerodrome Obstacle Charts)	159
Small River (perennial)	24
Spire (on Aerodrome Obstacle Charts)	160
Spot elevation	13
Spot elevation (of doubtful accuracy)	14

---

Spring (perennial or intermittent)		37
Stadium		77
Steel mesh runway (on Aerodrome/Heliport Charts)	152	
Stop bar (on Aerodrome/Heliport Charts)		157
Stopway — SWY (on Aerodrome/Heliport Charts)		146
Stopway — SWY (on Aerodrome Obstacle Charts)		166
Swamp	35	
TACAN (UHF tactical air navigation aid)		106,110
Tank farms		71
Taxiways (on Aerodrome/Heliport Charts)		147
Telegraph or telephone line (when a landmark)	66	
Temple		83
Terminal arrival altitude — TAA		169
Terrain penetrating obstacle plane (on Aerodrome Obstacle Charts)		164
Tidal flats		21
Topography		1-18
Tower (on Aerodrome Obstacle Charts)	160	
Town		48
Trail		60
Transmission line (on Aerodrome Obstacle Charts)		163
Tree (on Aerodrome Obstacle Charts)	159	
Tree, coniferous		15
Tree, other		16
UHF tactical air navigation aid — TACAN		106,110
Uncontrolled route		114
Unpaved runway (on Aerodrome/Heliport Charts)		145
Unusual land features, appropriately labelled	10	
Unusual water features, appropriately labelled	46	
VHF omnidirectional radio range — VOR		101,110
Village	49	
Visual aids		141-143
Visual flight path		119
VOR (VHF omnidirectional radio range)		101,110
VOR check-point (on Aerodrome/Heliport Charts)		150
VOR/DME (collocated VOR and DME radio navigation aids)		103,110
VOR radial		105
<i>Index</i>		<i>No.</i>
VORTAC (collocated VOR and TACAN radio navigation aids)		107,110
Wash		40
Water hole (perennial or intermittent)	37	
Waypoint — WPT		124
Well (perennial or intermittent)	37	

TOPOGRAPHY

1	Contours		8	Gravel		12	Highest elevation on chart	Alternative	<b>17456</b>
2	Approximate contours		9	Levee or esker	 Alternative 	13	Spot elevation		.6397 .8975
3	Relief shown by hachures		10	Unusual land features appropriately labelled		14	Spot elevation (of doubtful accuracy)		.6370±
4	Bluff, cliff or escarpment					15	Coniferous trees		
5	Lava flow			Active volcano		16	Other trees		
6	Sand dunes		11	Mountain pass		17	Palms		
7	Sand area								

18	Areas not surveyed for contour information or relief data incomplete	Caution
----	--	---------

HYDROGRAPHY

19	Shore line (reliable)		30	Abandoned canal <i>Note.— Dry canal having landmark value.</i>		38	Reservoir		<i>Reservoir</i>
20	Shore line (unreliable)		31	Lakes (perennial)		39	Dry lake bed	Alternative	
21	Tidal flats		32	Lakes (non-perennial)	Alternative	40	Wash	Alternative	
22	Coral reefs and ledges								
23	Large river (perennial)		33	Salt lake		41	Shoals		
24	Small river (perennial)		34	Salt pans (evaporator)		42	Glaciers and ice caps		
25	Rivers and streams (non-perennial)	Alternative	35	Swamp		43	Danger line (2 m or one fathom line)		
26	Rivers and streams (unsurveyed)		36	Rice field	Alternative	44	Charted isolated rock		
27	Rapids					45	Rock awash		
28	Falls		37	Spring, well or water hole	perennial	46	Unusual water features appropriately labelled		
29	Canal				intermittent				

BUILT-UP AREAS

47	City or large town	
48	Town	
49	Village	
50	Buildings	

HIGHWAYS AND ROADS

57	Dual highway	
58	Primary road	
59	Secondary road	
60	Trail	
61	Road bridge	
62	Road tunnel	

MISCELLANEOUS (Cont.)

69	Pipeline	
70	Oil or gas field	
71	Tank farms	
72	Nuclear power station	
73	Coast guard station	
74	Lookout tower	
75	Mine	
76	Forest ranger station	
77	Race track or stadium	
78	Ruins	
79	Fort	
80	Church	
81	Mosque	
82	Pagoda	
83	Temple	

RAILROADS

51	Railroad (single track)	
52	Railroad (two or more tracks)	
53	Railroad (under construction)	
54	Railroad bridge	
55	Railroad tunnel	
56	Railroad station	

MISCELLANEOUS

63	Boundaries (international)	
64	Outer boundaries	
65	Fence	
66	Telegraph or telephone line (when a landmark)	
67	Dam	
68	Ferry	

AERODROMES

84	Civil	Land	
85	Civil	Water	
86	Military	Land	
87	Military	Water	

88	Joint civil and military	Land	
89	Joint civil and military	Water	
90	Emergency aerodrome or aerodrome with no facilities		
91	Abandoned or closed aerodrome		

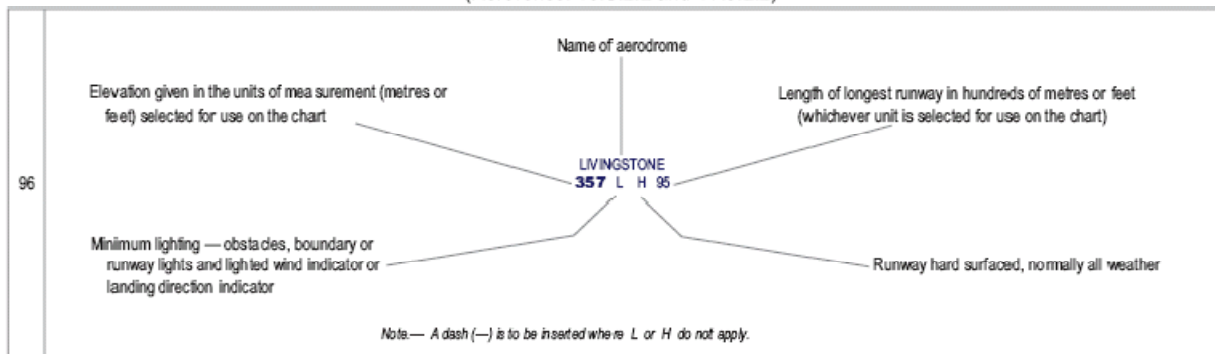
92	Sheltered anchorage	
93	Aerodrome for use on charts on which aerodrome classification is not required e.g. Enroute Charts	
94	Heliport Note.— Aerodrome for the exclusive use of helicopters	

95	Note.— Where required by the function of the chart, the run way pattern of the aerodrome may be shown in lieu of the aerodrome symbol, for example:	
----	---	--

AERODROMES (Cont.)

AERODROME DATA IN ABBREVIATED FORM WHICH MAY BE IN ASSOCIATION WITH AERODROME SYMBOLS

(Reference: 16.9.2.2 and 17.9.2.2)



AERODROME SYMBOLS FOR APPROACH CHARTS

97	Aerodromes affecting the traffic pattern on the aerodrome on which the procedure is based		98	The aerodrome on which the procedure is based	
----	---	--	----	---	--

RADIO NAVIGATION AIDS\*

99	Basic radio navigation aid symbol <i>Note.— This symbol may be used with or without a box to enclose the data.</i>				
100	No-directional radio beacon NDB		Electronic		
101	VHF omnidirectional radio range VOR				
102	Distance measuring equipment DME				
103	Collocated VOR and DME radio navigation aids VOR/DME				
104	DME distance	Distance in kilometres (nautical miles) to DME → 15 km Identification of radio navigation aid → KAV			
105	VOR radial	Radial bearing from, and identification of, VOR → R 090 KAV			
106	UHF tactical air navigation aid TACAN				
107	Collocated VOR and TACAN radio navigation aids VORTAC				
108	Instrument landing system ILS	PLAN VIEW 		Electronic 	
		FRONT COURSE 		BACK COURSE 	
		PROFILE 		Electronic 	
		GLIDE PATH 			
109	Radio marker beacon	Elliptical 		Bone Shape 	
<i>Note.— Marker beacon may be shown by outline, or stipple, or both.</i>					

110	Compass rose To be orientated on the chart in accordance with the alignment of the station (normally Magnetic North)			Compass rose to be used as appropriate in combination with the following symbols:	
<i>Note.— Additional points of compass may be added as required.</i>					

\* Note.— Guidance material on the presentation of radio navigation aid data is given in the Aeronautical Chart Manual (Doc 8697).

AIR TRAFFIC SERVICES

111	Flight information region	FIR			
112	Aerodrome traffic zone	ATZ			
113	Control area Airway Controlled route	CTA AWY	Alternative 		
114	Uncontrolled route				
115	Advisory airspace	ADA			
116	Control zone	CTR			
117	Air defence identification zone	ADIZ			
118	Advisory route	ADR	Alternative 		
119	Visual flight path			compulsory with radio communication requirement	..... (R) .....
				compulsory, without radio communication requirement	..... (R) .....
				recommended	.....
120	Scale-break (on ATS route)		Alternative 		
121	Reporting point	REP		Compulsory	
				On request	
122	Change-over point	COP		To be superimposed on the appropriate route symbol at right angles to the route	
123	ATS/MET reporting point	MRP		Compulsory	
				On request	
124	Waypoint WPT		Alternative 	Flyover WPT (also used for start point and end point of a controlled turn)	
				Fly-by WPT	
125	Final approach fix	FAF			

126	Altitudes/flight levels	Altitude/flight level "window"	<u>17 000</u> <u>10 000</u>	<u>FL 220</u> <u>10 000</u>
		"At or above" altitude/flight level	<u>7 000</u>	<u>FL 70</u>
		"At or below" altitude/flight level	<u>5 000</u>	<u>FL 50</u>
		"Mandatory" altitude/flight level	<u>3 000</u>	<u>FL 30</u>
		"Recommended" procedure altitude/flight level	5 000	FL 50
		"Expected" altitude	Expect 5 000	Expect FL 50
<i>Note – For use only on SID and STAR charts. Not intended for depiction of minimum obstacle clearance altitude.</i>				

AIRSPACE CLASSIFICATIONS

127	Airspace classifications			<p>Aeronautical data in abbreviated form to be used in association with airspace classification symbols:</p>
		128	Alternative	

AIRSPACE RESTRICTIONS

129	Restricted airspace (prohibited, restricted or danger area)		Common boundary of two areas	
	<p>Note.— The angle and density of rulings may be varied according to scale and the size, shape and orientation of the area.</p>			
130	International boundary closed to passage of aircraft except through air corridor			

OBSTACLES

131	Obstacle		135	Exceptionally high obstacle (optional symbol)	
132	Lighted obstacle		136	Exceptionally high obstacle - lighted (optional symbol)	
133	Group obstacles		<p>Note.— For obstacles having a height of the order of 300 m (1 000 ft) above terrain.</p>		
134	Lighted group obstacles		137	<p>Elevation of top (Italics) <math>\rightarrow</math> <math>\leftarrow</math> Height above specified datum (upright type in parentheses)</p>	

MISCELLANEOUS

138	Prominent transmission line		139	Isogonic line or isogonal	$3^{\circ} E$	140	Ocean station vessel (normal position)	
-----	-----------------------------	--	-----	---------------------------	---------------	-----	--	--

VISUAL AIDS

141	Marine light Note 2— Characteristics are to be indicated as follows:	<p><b>F</b> ●</p>		<p>Note 1— Marine alternating lights are red and white unless otherwise indicated. Marine lights are white unless colours are stated.</p>			
		Alt B F	Alternating Blue Fixed	Fl G Gp	Flashing Green Group	Occ R SEC	Oscillating Red Sector
142	Aeronautical ground light		Electronic		143	Lighthouse	



**SYMBOLS FOR AERODROME/HELIPORT CHARTS**

144	Hard surface runway		152	Pierced steel plank or steel mesh runway	
145	Unpaved runway		153	Point light	
146	Stopway SWY				
147	Taxiways and parking areas		154	Obstacle light	
148	Helicopter alighting area on an aerodrome		155	Landing direction indicator (lighted)	
149	Aerodrome reference point ARP		156	Landing direction indicator (unlighted)	
150	VOR check-point		157	Stop bar	
151	Runway visual range (RVR) observation site		158	Runway-holding position	Pattern A
					Pattern B

*Note.— For application, see Annex 14, Volume I, paragraph 5.2.10.*

**SYMBOLS FOR AERODROME OBSTACLE CHARTS - TYPE A, B AND C**

		Plan	Profile		Plan	Profile
159	Tree or shrub			164	Terrain penetrating obstacle plane	
160	Pole, tower, spire, antenna, etc.			165	Escarpment	
161	Building or large structure			166	Stopway SWY	
162	Railroad			167	Clearway CWY	
163	Transmission line or overhead cable					

ADDITIONAL SYMBOLS FOR USE ON PAPER AND ELECTRONIC CHARTS

PLAN VIEW

168	<p>Minimum sector altitude <i>Note.- This symbol may be modified to reflect particular sector shapes.</i></p>	MSA	
169	<p>Terminal arrival altitude <i>Note.- This symbol may be modified to reflect particular TAA shapes.</i></p>	TAA	
170	Holding pattern		
171	Missed approach track		

PROFILE

172	Runway	
173	Radio navigation aid (type of aid and its use in the procedure to be annotated on top of the symbol)	
174	Radio marker beacon (type of beacon to be annotated on top of the symbol)	
175	Collocated radio navigation aid and marker beacon (type of aid to be annotated on top of the symbol)	
176	DME fix (distance from DME and the fix use in the procedure to be annotated on top of the symbol)	
177	Collocated DME fix and marker beacon (distance from DMF and the type of beacon to be annotated on top of the symbol)	

APPENDIX 3 COLOUR GUIDE

APPENDIX 3. COLOUR GUIDE

(Ref. 2.11.1)

CHART SYMBOLS





























Culture, except highways and roads; outlines of large cities, grids and graticules; spot elevations; danger lines and off-shore rocks; names and lettering except for aeronautical and hydrographic features	BLACK	
Built-up areas of cities	BLACK Stipple	
Highways and roads	Optional colours	
	RED	
Built-up areas for cities (alternative to black stipple)	YELLOW	
Contours and topographic features: Items 1 through 10 of Appendix 2. Hydrographic features: Items 39 through 41 of Appendix 2	BROWN	
Shore lines, drainage, rivers, lakes, bathymetric contours and other hydrographic features including their names or description	BLUE	
Open water areas	BLUE Half-tone	
Salt lakes and salt pans	BLUE Stipple	
Large non-perennial rivers and non-perennial lakes	BLUE Stipple	
Aeronautical data, except for Enroute and Area Charts - ICAO, where different colours may be required. Both colours may be used on the same sheet but, where only one colour is used, dark blue is preferred	Optional colours	
	DARK BLUE	

CHART SYMBOLS (Cont.)

Woods		GREEN	
Areas which have not been surveyed for contour information or relief data are incomplete	Optional colours	GOLDEN BUFF	
		WHITE	


HYPSONETRIC TINTS

	WHITE	Tint for extreme elevation			
	VIOLET			SEPIA	
	ORANGE or BUFF	Tint for higher range elevations		BROWN	
	YELLOW			BUFF	
	GREEN	Tint for lower range elevations	Optional colours	GREEN	
				WHITE	
	BLUE GREEN	Tint for areas below sea level	Optional colours	BLUE - GREEN	
				LIGHT GREY	

*Note.— Basic tints are identical to those specified for the International Map of the World*

APPENDIX 4 HYPSONOMETRIC TINT GUIDE

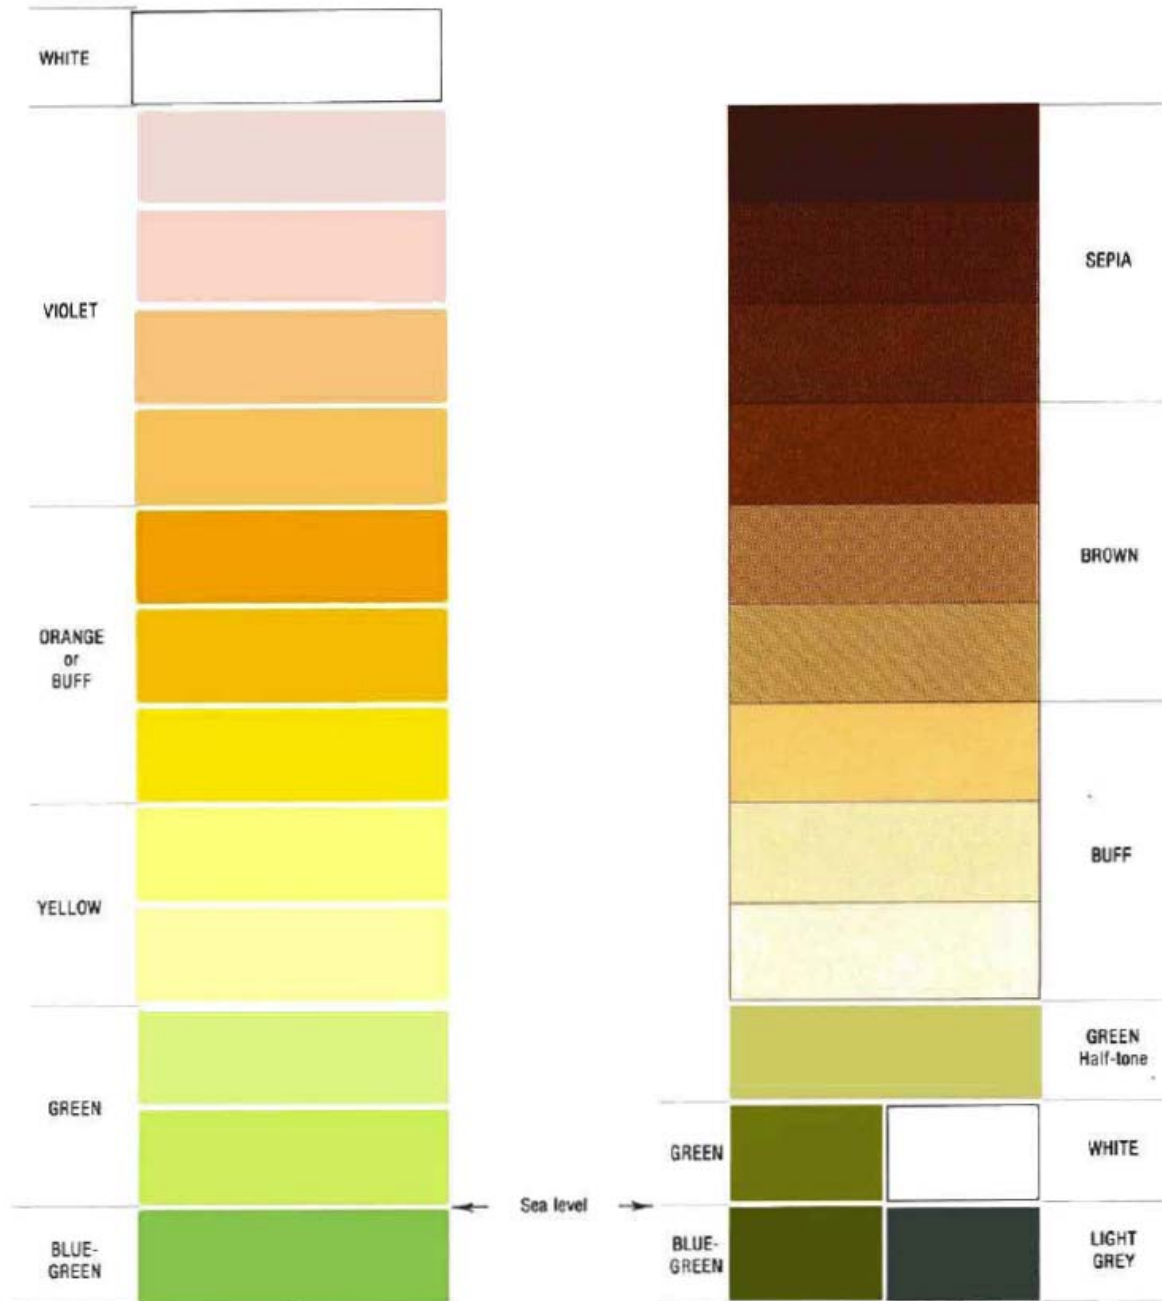APPENDIX 4. HYPSONOMETRIC TINT GUIDE  
(Alternative systems, reference 2.12.2)




Note 1.— These tints are identical to those specified for the International Map of the World

Note 2.— Elevations have not been associated with tints of either system in order to allow for flexibility in their selection.



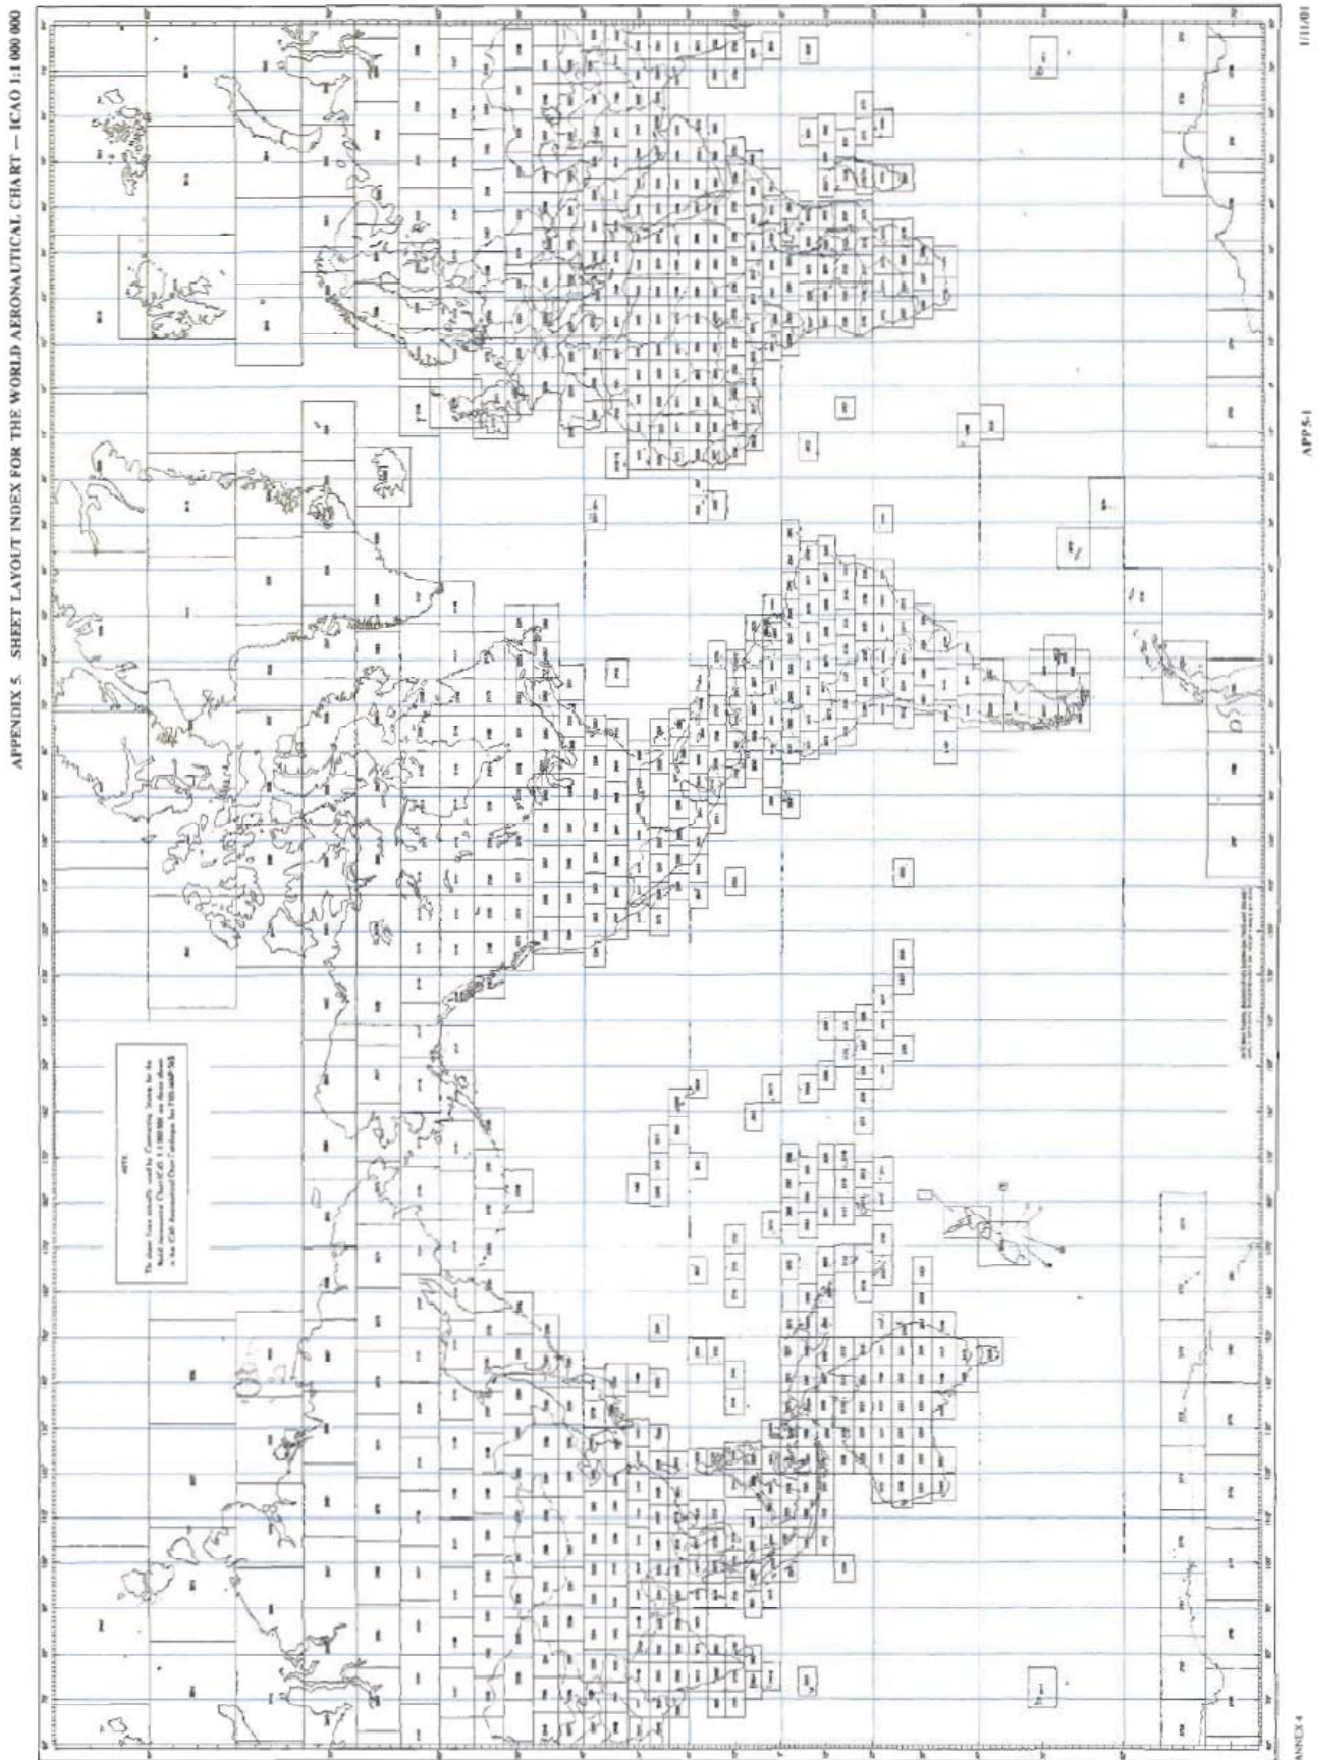APPENDIX 5 SHEET LAYOUT INDEX FOR THE WORLD



## APPENDIX 6 AERONAUTICAL DATA QUALITY REQUIREMENTS

**Table 1. Latitude and longitude**

*Note.— See Annex 15, Appendix 8, for graphical illustrations of obstacle data collection surfaces and criteria used to identify obstacles in the defined areas.*

Latitude and longitude	Chart resolution	Integrity Classification
Flight information region boundary points . . . . .as plotted routine		1 × 10 <sup>-3</sup>
P, R, D area boundary points (outside CTA/CTZ boundaries) . . . . .as plotted routine		1 × 10 <sup>-3</sup>
P, R, D area boundary points (inside CTA/CTZ boundaries) . . . . . as plotted essential		1 × 10 <sup>-5</sup>
CTA/CTZ boundary points . . . . . as plotted essential		1 × 10 <sup>-5</sup>
En-route nav aids and fixes, holding, STAR/SID points . . . . . 1 sec essential		1 × 10 <sup>-5</sup>
Obstacles in Area 1 (the entire State territory) . . . . . as plotted routine		1 × 10 <sup>-3</sup>
Aerodrome/heliport reference point . . . . . 1 sec routine		1 × 10 <sup>-3</sup>
Nav aids located at the aerodrome/heliport . . . . . as plotted essential		1 × 10 <sup>-5</sup>
Obstacles in Area 3 . . . . . 1/10 sec essential		1 × 10 <sup>-5</sup>
Obstacles in Area 2 . . . . . 1/10 sec essential		1 × 10 <sup>-5</sup>
Final approach fixes/points and other essential fixes/points comprising the instrument approach procedure . . . . . 1 sec essential		1 × 10 <sup>-5</sup>
Runway thresholds . . . . . 1 sec critical		1 × 10 <sup>-8</sup>
Taxiway centre line/parking guidance line points . . . . . 1/100 sec essential		1 × 10 <sup>-5</sup>
Runway end (flight path alignment point) 1 sec		1 × 10 <sup>-8</sup>
critical		
Runway holding position . . . . . 1 sec critical		1 × 10 <sup>-8</sup>
Taxiway intersection marking line . . . . . 1 sec essential		1 × 10 <sup>-5</sup>
Exit guidance line . . . . . 1 sec essential		1 × 10 <sup>-5</sup>
Apron boundaries (polygon) . . . . . 1 sec routine		1 × 10 <sup>-3</sup>
De-/anti-icing facility (polygon) . . . . . 1 sec routine		1 × 10 <sup>-3</sup>
Aircraft standpoints/INS checkpoints . . . . . 1/100 sec routine		1 × 10 <sup>-3</sup>
Geometric centre of TLOF or FATO thresholds, heliports . . . . . 1 sec critical		1 × 10 <sup>-8</sup>

**Table 2. Elevation/altitude/height**

*Note.— See Annex 15, Appendix 8, for graphical illustrations of obstacle data collection surfaces and criteria used to identify obstacles in the defined areas.*

<b>Elevation/altitude/height Classification</b>	<b>Chart resolution</b>	<b>Integrity</b>
Aerodrome/heliport elevation . . . . .	1 m or 1 ft	1 × 10-5
essential		
WGS-84 geoid undulation at aerodrome/heliport elevation position . . .	1 m or 1 ft	1 × 10-5
essential		
Runway or FATO threshold, non-precision approaches. . . . .	1 m or 1 ft	1 × 10-5
essential		
WGS-84 geoid undulation at runway or FATO threshold, TLOF geometric centre, non-precision approaches . . . . .	1 m or 1 ft	1 × 10-5
essential		
Runway or FATO threshold, precision approaches . . . . .	0.5 m or 1 ft	1 × 10-8
critical		
WGS-84 geoid undulation at runway or FATO threshold, TLOF geometric centre, precision approaches . . . . .	0.5 m or 1 ft	1 × 10-8
critical		
Threshold crossing height, precision approaches . . . . .	0.5 m or 1 ft	1 × 10-8
critical		
Obstacle clearance altitude/height (OCA/H) . . . . .	as specified in PANS-OPS (Doc 8168)	1 × 10-5
essential		
Obstacles in Area 1 (the entire State territory) . . . . .	3 m (10 ft)	1 × 10-3
routine		
Obstacles in Area 2 . . . . .	1 m or 1 ft	1 × 10-5
essential		
Obstacles in Area 3 . . . . .	1 m or 1 ft	1 × 10-5
essential		
Distance measuring equipment (DME) . . . . .	30 m (100 ft)	1 × 10-5
essential		
Instrument approach procedures altitude . . . . .	as specified in PANS-OPS (Doc 8168)	1 × 10-5
essential		
Minimum altitudes. . . . .	50 m or 100 ft	1 × 10-3
routine		

**Table 3. Magnetic variation**

<b>Magnetic variation Classification</b>	<b>Chart resolution</b>	<b>Integrity</b>
Aerodrome/heliport magnetic variation . . . . .	1 degree	1 × 10-5
Essential		



**Table 4. Bearing**

<b>Bearing Classification</b>	<b>Chart resolution</b>	<b>Integrity</b>
Airway segments . . . . . routine	1 degree	1 × 10 <sup>-3</sup>
En-route and terminal fix formations . . . . . routine	1/10 degree	1 × 10 <sup>-3</sup>
Terminal arrival/departure route segments . . . . . routine	1 degree	1 × 10 <sup>-3</sup>
Instrument approach procedure fix formations . . . . . essential	1/10 degree	1 × 10 <sup>-5</sup>
ILS localizer alignment . . . . . essential	1 degree	1 × 10 <sup>-5</sup>
MLS zero azimuth alignment . . . . . essential	1 degree	1 × 10 <sup>-5</sup>
Runway and FATO bearing. . . . . routine	1 degree	1 × 10 <sup>-3</sup>

**Table 5. Length/distance/dimension**

<b>Length/distance/dimension Classification</b>	<b>Chart resolution</b>	<b>Integrity</b>
Airway segment length . . . . . routine	1 km or 1 NM	1 × 10 <sup>-3</sup>
En-route fix formation distance . . . . . routine	2/10 km (1/10 NM)	1 × 10 <sup>-3</sup>
Terminal arrival/departure route segment length . . . . . essential	1 km or 1 NM	1 × 10 <sup>-5</sup>
Terminal and instrument approach procedure fix formation distance . . . . . essential	2/10 km (1/10 NM)	1 × 10 <sup>-5</sup>
Runway and FATO length, TLOF dimensions . . . . . critical	1 m	1 × 10 <sup>-8</sup>
Runway width . . . . . essential	1 m	1 × 10 <sup>-5</sup>
Stopway length and width. . . . . critical	1 m	1 × 10 <sup>-8</sup>
Landing distance available . . . . . critical	1 m	1 × 10 <sup>-8</sup>
Take-off run available . . . . . critical	1 m	1 × 10 <sup>-8</sup>
Take-off distance available . . . . . critical	1 m	1 × 10 <sup>-8</sup>
Accelerate-stop distance available . . . . . critical	1 m	1 × 10 <sup>-8</sup>
ILS localizer antenna-runway end, distance. . . . . routine	as plotted	1 × 10 <sup>-3</sup>
ILS glide slope antenna-threshold, distance along centre line . . . . . routine	as plotted	1 × 10 <sup>-3</sup>
ILS marker-threshold distance . . . . . essential	2/10 km (1/10 NM)	1 × 10 <sup>-5</sup>
ILS DME antenna-threshold, distance along centre line . . . . . essential	as plotted	1 × 10 <sup>-5</sup>

---

MLS azimuth antenna-runway end, distance . . . . . as plotted routine	1 × 10 <sup>-3</sup>
MLS elevation antenna-threshold, distance along centre line . . . . . as plotted routine	1 × 10 <sup>-3</sup>
MLS DME/P antenna-threshold, distance along centre line . . . . . as plotted Essential	1 × 10 <sup>-5</sup>